

Technical Data

FLIR A310

Part number:**48201-1101****Copyright**

© 2013, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

September 20, 2013, 05:27 AM

Corporate Headquarters

FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
Telephone: +1-503-498-3547

Website<http://www.flir.com>**Customer support**<http://support.flir.com>**Legal disclaimer**

Specifications subject to change without further notice.
Camera models and accessories subject to regional
market considerations. License procedures may apply.

Information and equipment described herein may
require US Government authorization for export
purposes. Diversion contrary to US law is prohibited.

**Imaging and optical data**

IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	< 0.05°C @ +30°C (+86°F) / 50 mK
Field of view (FOV) / Minimum focus distance	25° × 18.8° / 0.4 m (1.31 ft.)
Focal length	18 mm (0.7 in.)
Spatial resolution (IFOV)	1.36 mrad
Lens identification	Automatic
F-number	1.3
Image frequency	30 Hz
Focus	Automatic or manual (built in motor)
Zoom	1–8x continuous, digital, interpolating zooming on images

Detector data

Focal Plane Array (FPA) / Spectral range	Uncooled microbolometer / 7.5–13 μm
Detector pitch	25 μm
Detector time constant	Typical 12 ms

Measurement

Object temperature range	-20 to +120°C (-4 to +248°F) 0 to +350°C (+32 to +662°F)
Accuracy	±2°C (±3.6°F) or ±2% of reading

Measurement analysis

Spotmeter	10
Area	10 boxes with max./min./average/position
Isotherm	1 with above/below/interval
Measurement option	Measurement Mask Filter Schedule response: File sending (ftp), email (SMTP)
Difference temperature	Delta temperature between measurement functions or reference temperature
Reference temperature	Manually set or captured from any measurement function
Atmospheric transmission correction	Automatic, based on inputs for distance, atmospheric temperature and relative humidity
Optics transmission correction	Automatic, based on signals from internal sensors
Emissivity correction	Variable from 0.01 to 1.0
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
External optics/windows correction	Automatic, based on input of optics/window transmission and temperature
Measurement corrections	Global and individual object parameters

Alarm

Alarm functions	6 automatic alarms on any selected measurement function, Digital In, Camera temperature, timer
-----------------	---

P/N: 48201-1101© 2013, FLIR Systems, Inc.
All rights reserved worldwide.**Alarm**

Alarm output	Digital Out, log, store image, file sending (ftp), email (SMTP), notification
--------------	---

Set-up

Color palettes	Color palettes (BW, BW inv, Iron, Rain)
Set-up commands	Date/time, Temperature°C/F

Storage of images

Storage media	Built-in memory for image storage
File formats	Standard JPEG, 16-bit measurement data included

Ethernet

Ethernet	Control, result and image
Ethernet, type	100 Mbps
Ethernet, standard	IEEE 802.3
Ethernet, connector type	RJ-45
Ethernet, communication	TCP/IP socket-based FLIR proprietary
Ethernet, video streaming	MPEG-4, ISO/IEC 14496-1 MPEG-4 ASP@L5
Ethernet, image streaming	16-bit 320 × 240 pixels @ 7-8 Hz - Radiometric
Ethernet, power	Power over Ethernet, PoE IEEE 802.3af class 0
Ethernet, protocols	Ethernet/IP, Modbus TCP, TCP, UDP, SNTP, RTSP, RTP, HTTP, ICMP, IGMP, ftp, SMTP, SMB (CIFS), DHCP, MDNS (Bonjour), uPnP

Digital input/output

Digital input, purpose	Image tag (start/stop/general), Input ext. device (programmatically read)
Digital input	2 opto-isolated, 10–30 VDC
Digital output, purpose	As function of ALARM, Output to ext. device (programmatically set)
Digital output	2 opto-isolated, 10–30 VDC, max 100 mA
Digital I/O, isolation voltage	500 VRMS
Digital I/O, supply voltage	12/24 VDC, max 200 mA
Digital I/O, connector type	6-pole jackable screw terminal

Composite video

Video out	Composite video output, PAL and NTSC compatible
Video, standard	CVBS (ITU-R-BT.470 PAL/SMPTE 170M NTSC)

Power system

External power operation	12/24 VDC, 24 W absolute max
External power, connector type	2-pole jackable screw terminal
Voltage	Allowed range 10–30 VDC

Environmental data

Operating temperature range	-15°C to +50°C (+5°F to +122°F)
Storage temperature range	-40°C to +70°C (-40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25°C to +40°C (+77°F to +104°F)
EMC	<ul style="list-style-type: none">• EN 61000-6-2:2001 (Immunity)• EN 61000-6-3:2001 (Emission)• FCC 47 CFR Part 15 Class B (Emission)
Encapsulation	IP 40 (IEC 60529)
Bump	25 g (IEC 60068-2-29)
Vibration	2 g (IEC 60068-2-6)

P/N: 48201-1101

© 2013, FLIR Systems, Inc.
All rights reserved worldwide.

Physical data

Weight	0.7 kg (1.54 lb.)
Camera size (L × W × H)	170 × 70 × 70 mm (6.7 × 2.8 × 2.8 in.)
Tripod mounting	UNC 1/4"-20 (on three sides)
Base mounting	2 × M4 thread mounting holes (on three sides)
Housing material	Aluminum

Shipping information

- Infrared camera with lens
- Calibration certificate
- Cardboard box
- Downloads brochure
- Ethernet™ cable
- FLIR apps card
- FLIR Tools download card
- Getting Started Guide
- Important Information Guide
- Mains cable
- Optics brochure
- Power cable, pig-tailed
- Power supply
- Service & training brochure
- Thank you card
- User documentation CD-ROM
- Utility CD-ROM
- Registration card

Camera with built-in IR lens f=18 mm (25°)

A

B

C






D

E

F

G

H

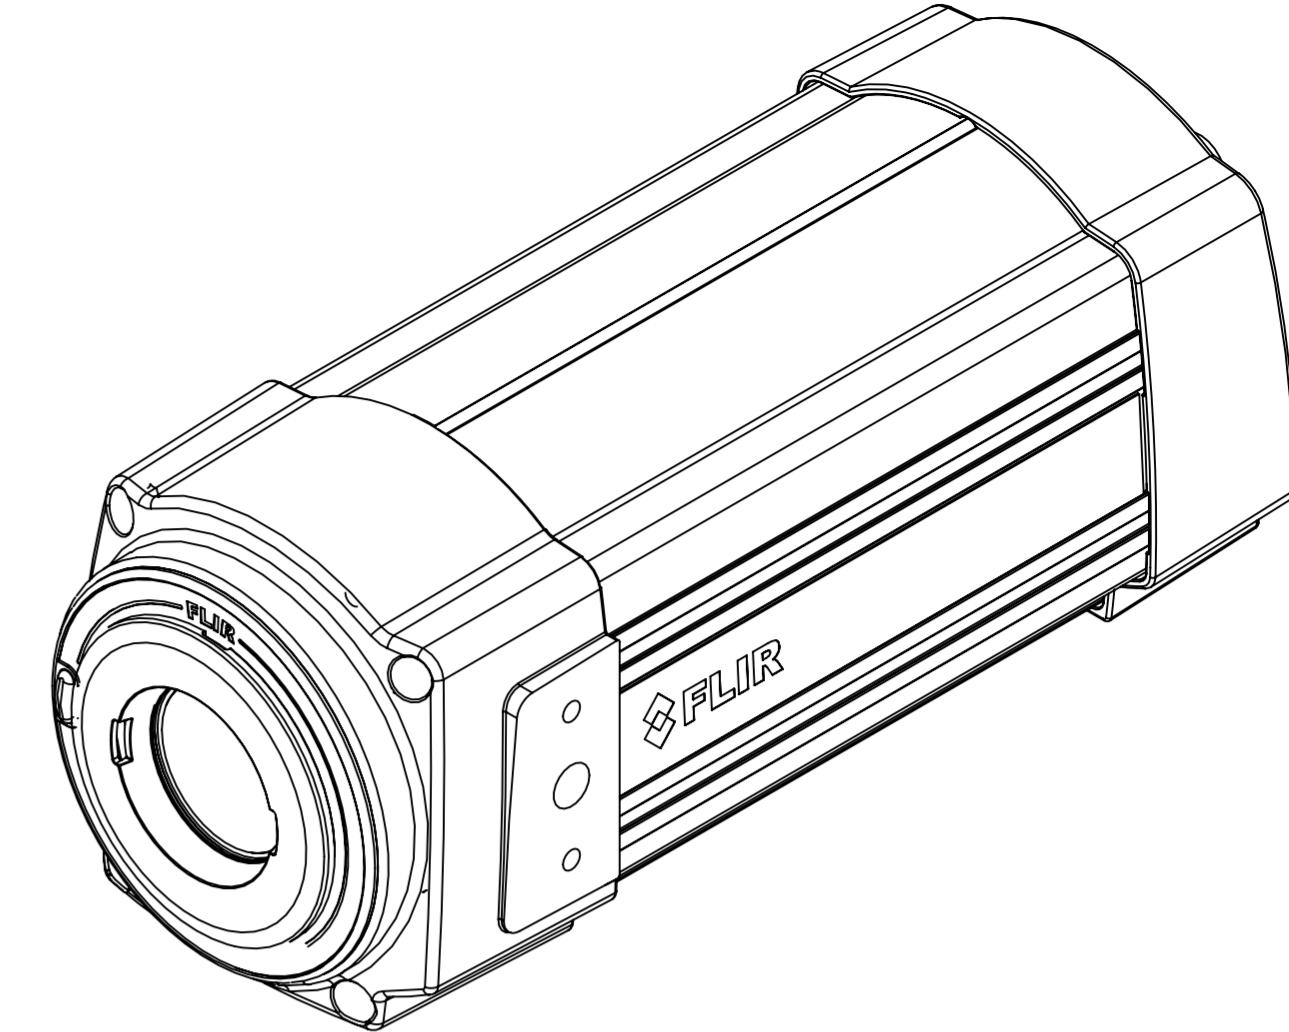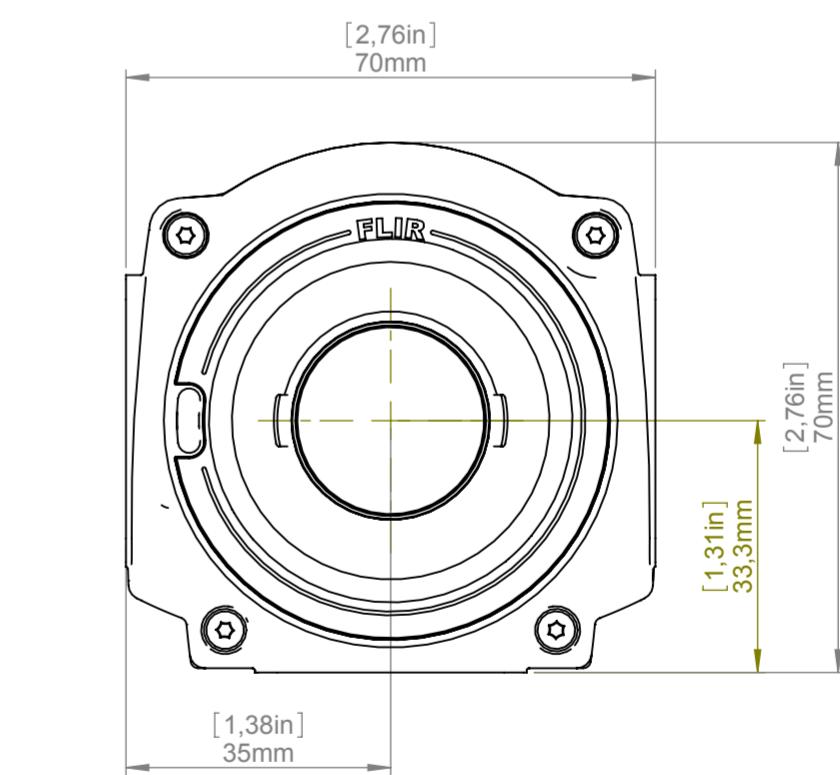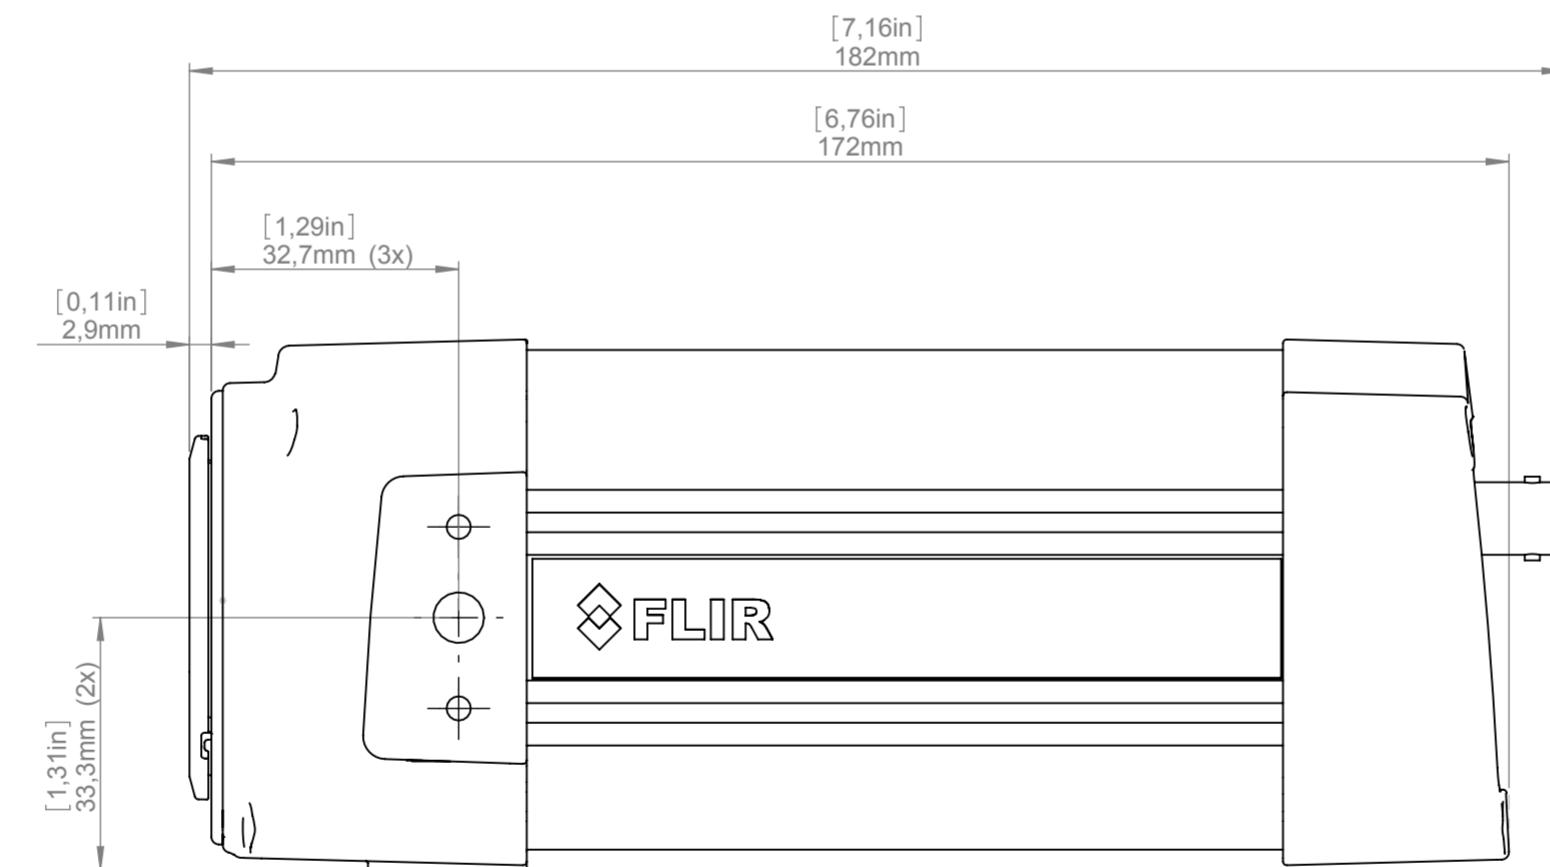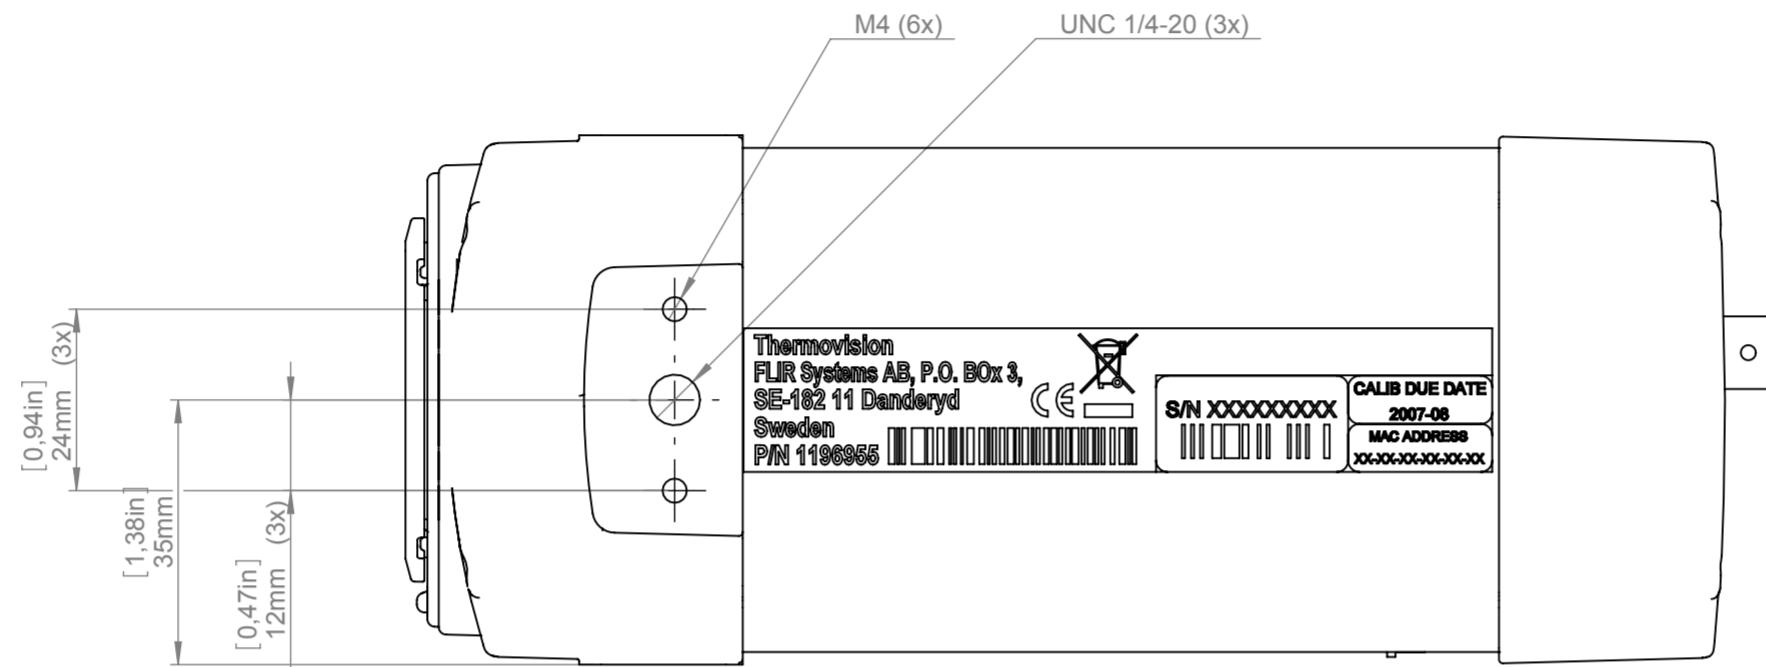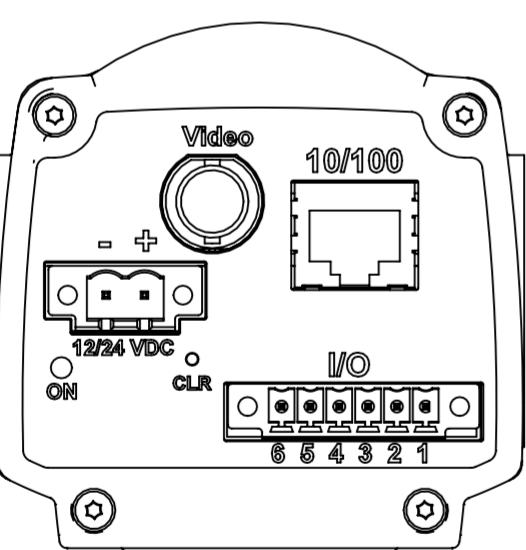

Modified 2012-04-18 Check CAHA Drawn by R&D Thermography

Denomination

Basic dimensions FLIR A3xx/SC3xx

Size A3
Scale 1:1
Drawing No. T125002
Sheet 1(8)
Size A

FLIR

1 2 3 4 5 6 7 8 9 10






Camera with Lens IR f=4 mm (90°) incl support

©2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional import considerations. License procedures may apply.

Product may be subject to US Export Regulations. Please refer to exports@flir.com with any questions. Diversion contrary to US law is prohibited.

For additional dimensions see page 1

A A
B B
C C
D D
E E
F F
G G
H H

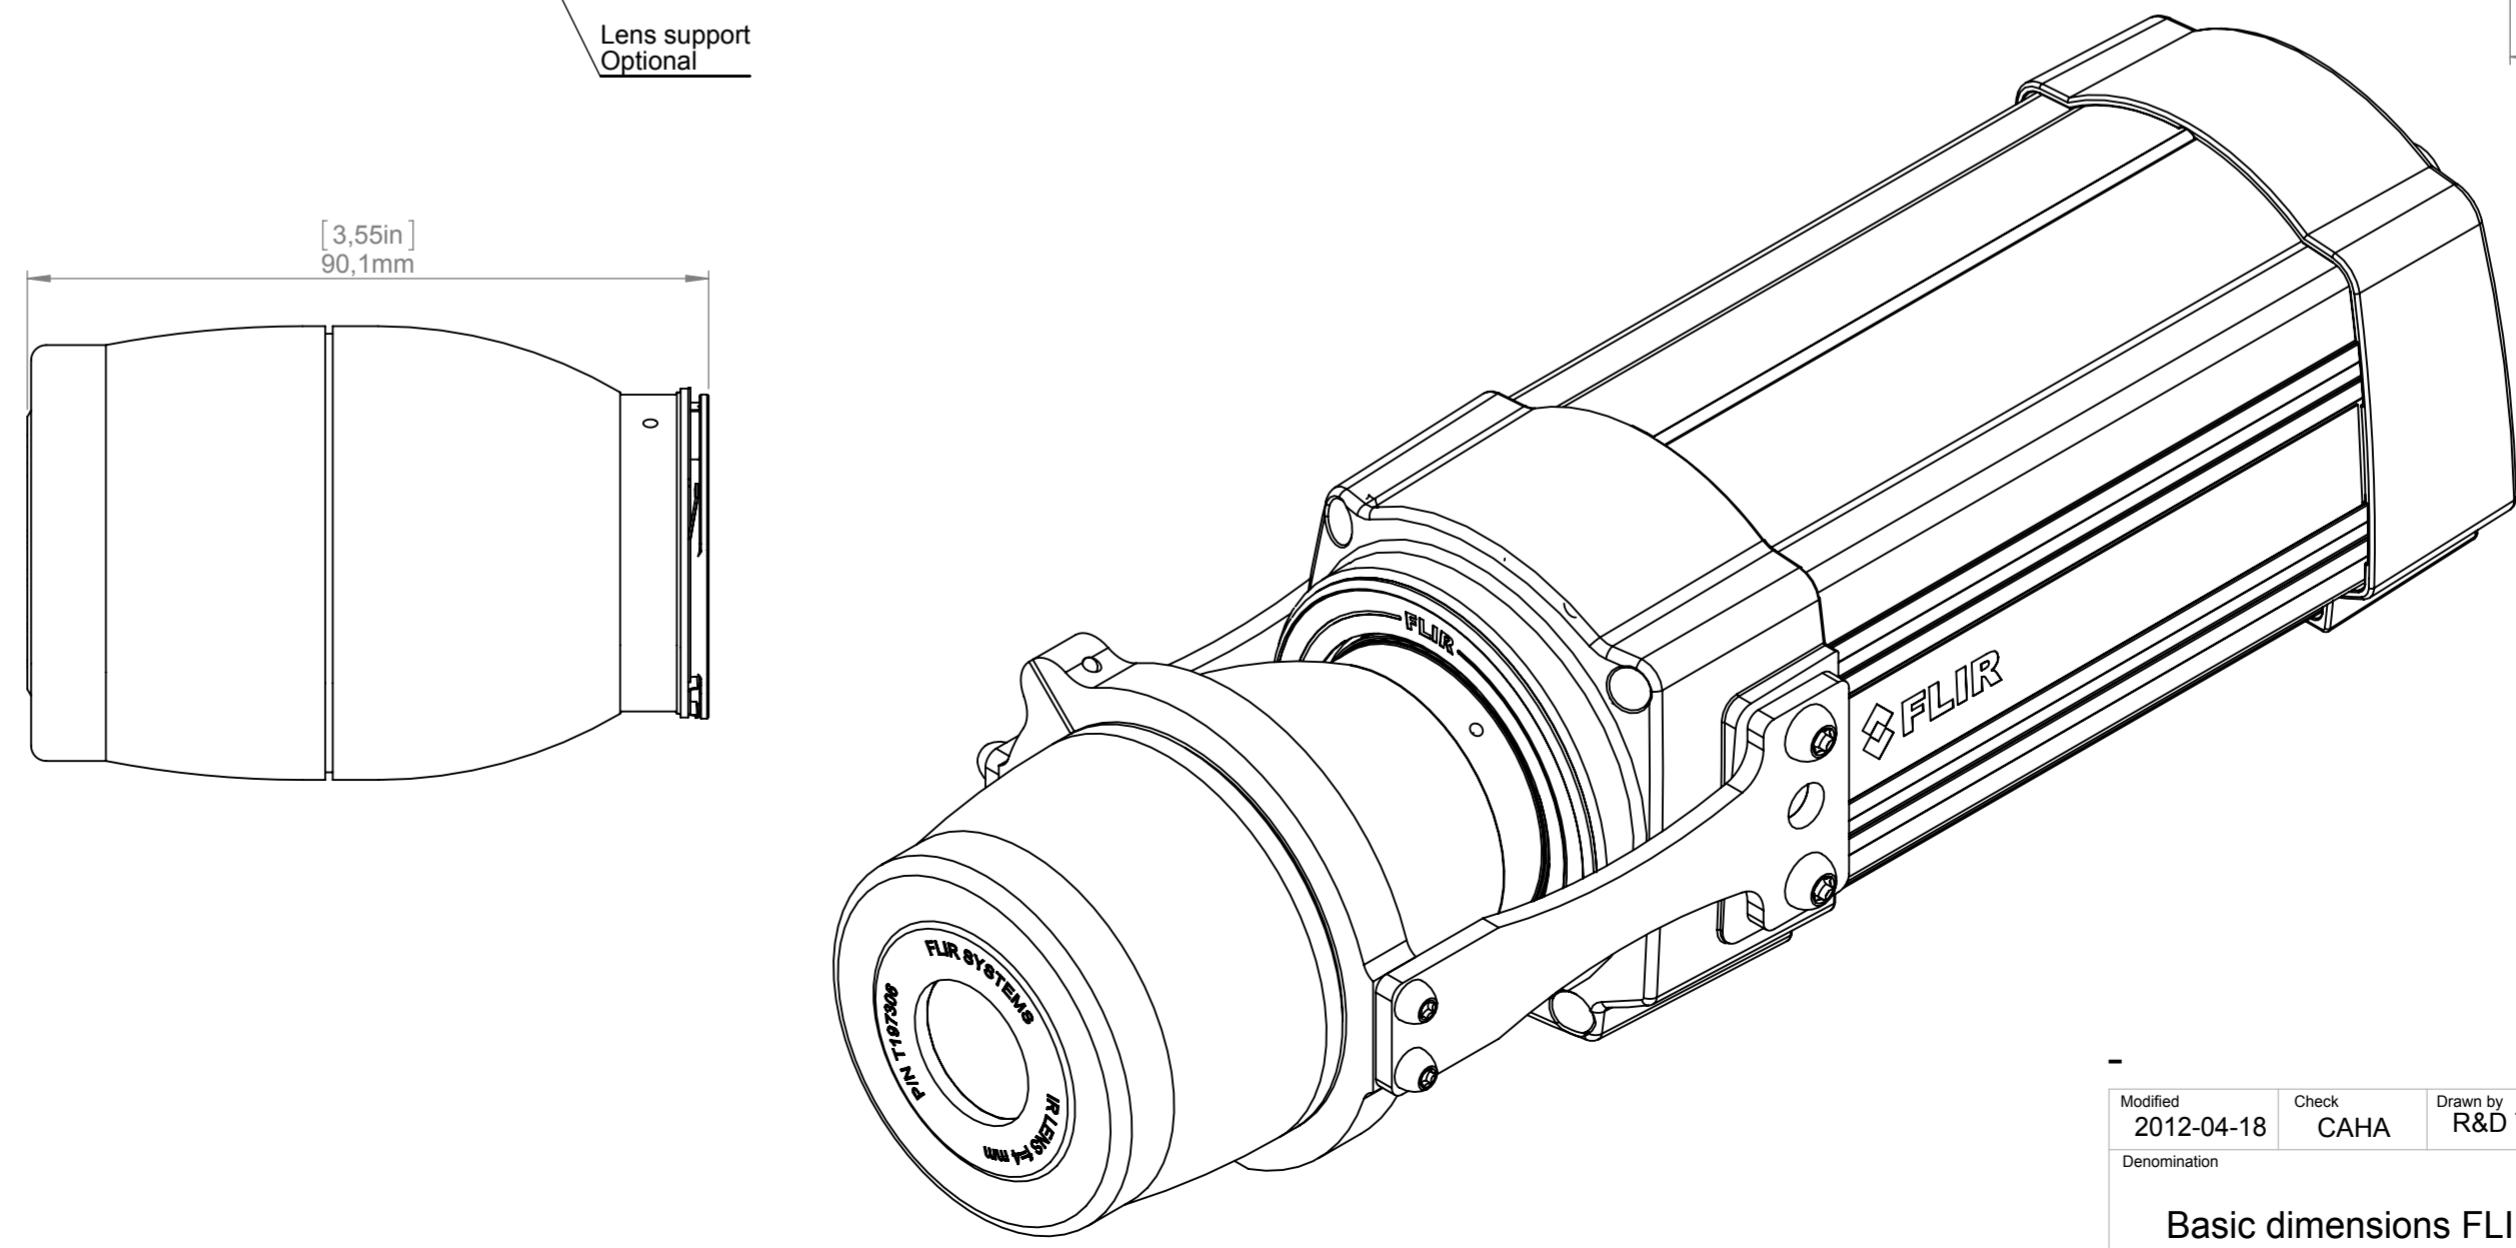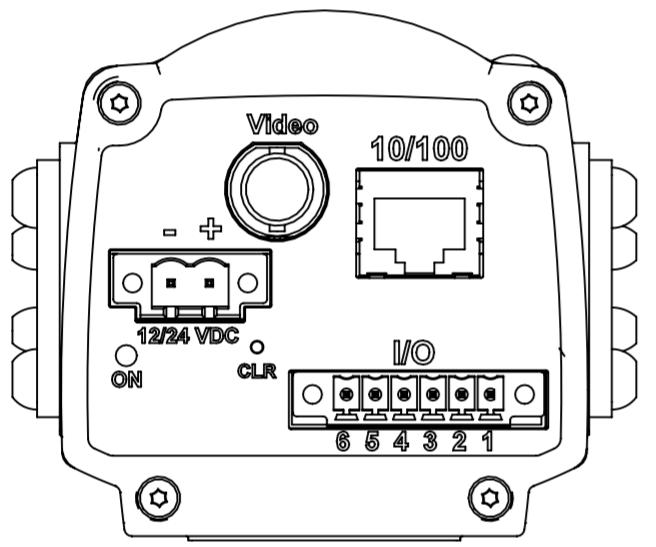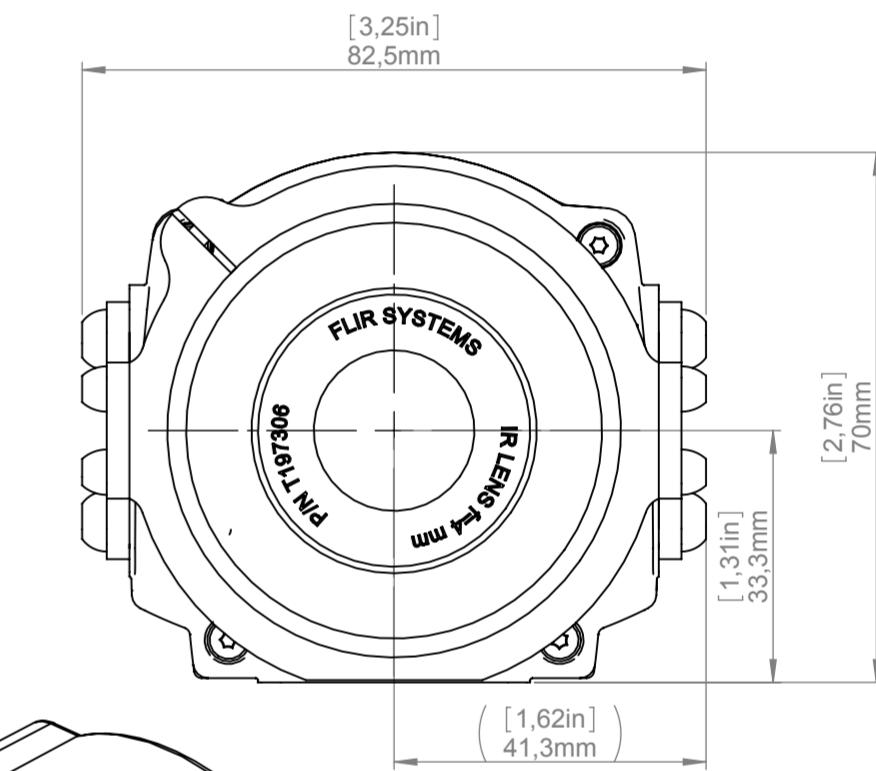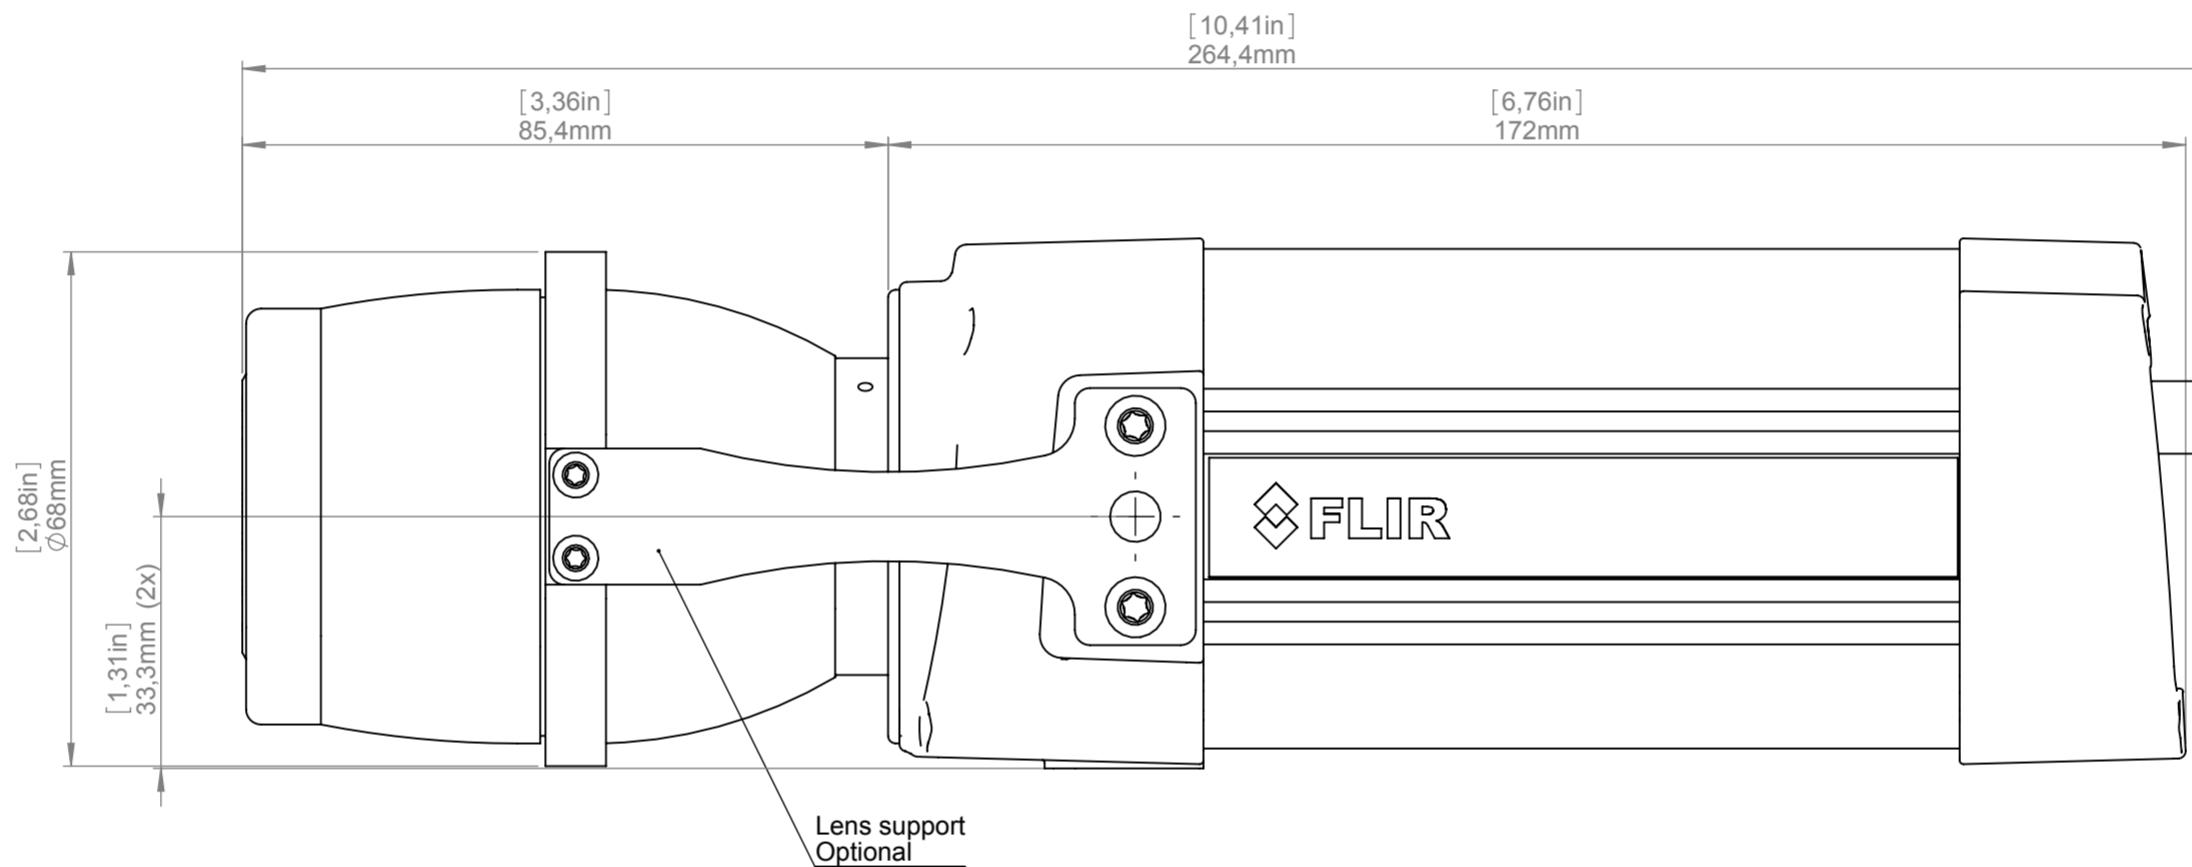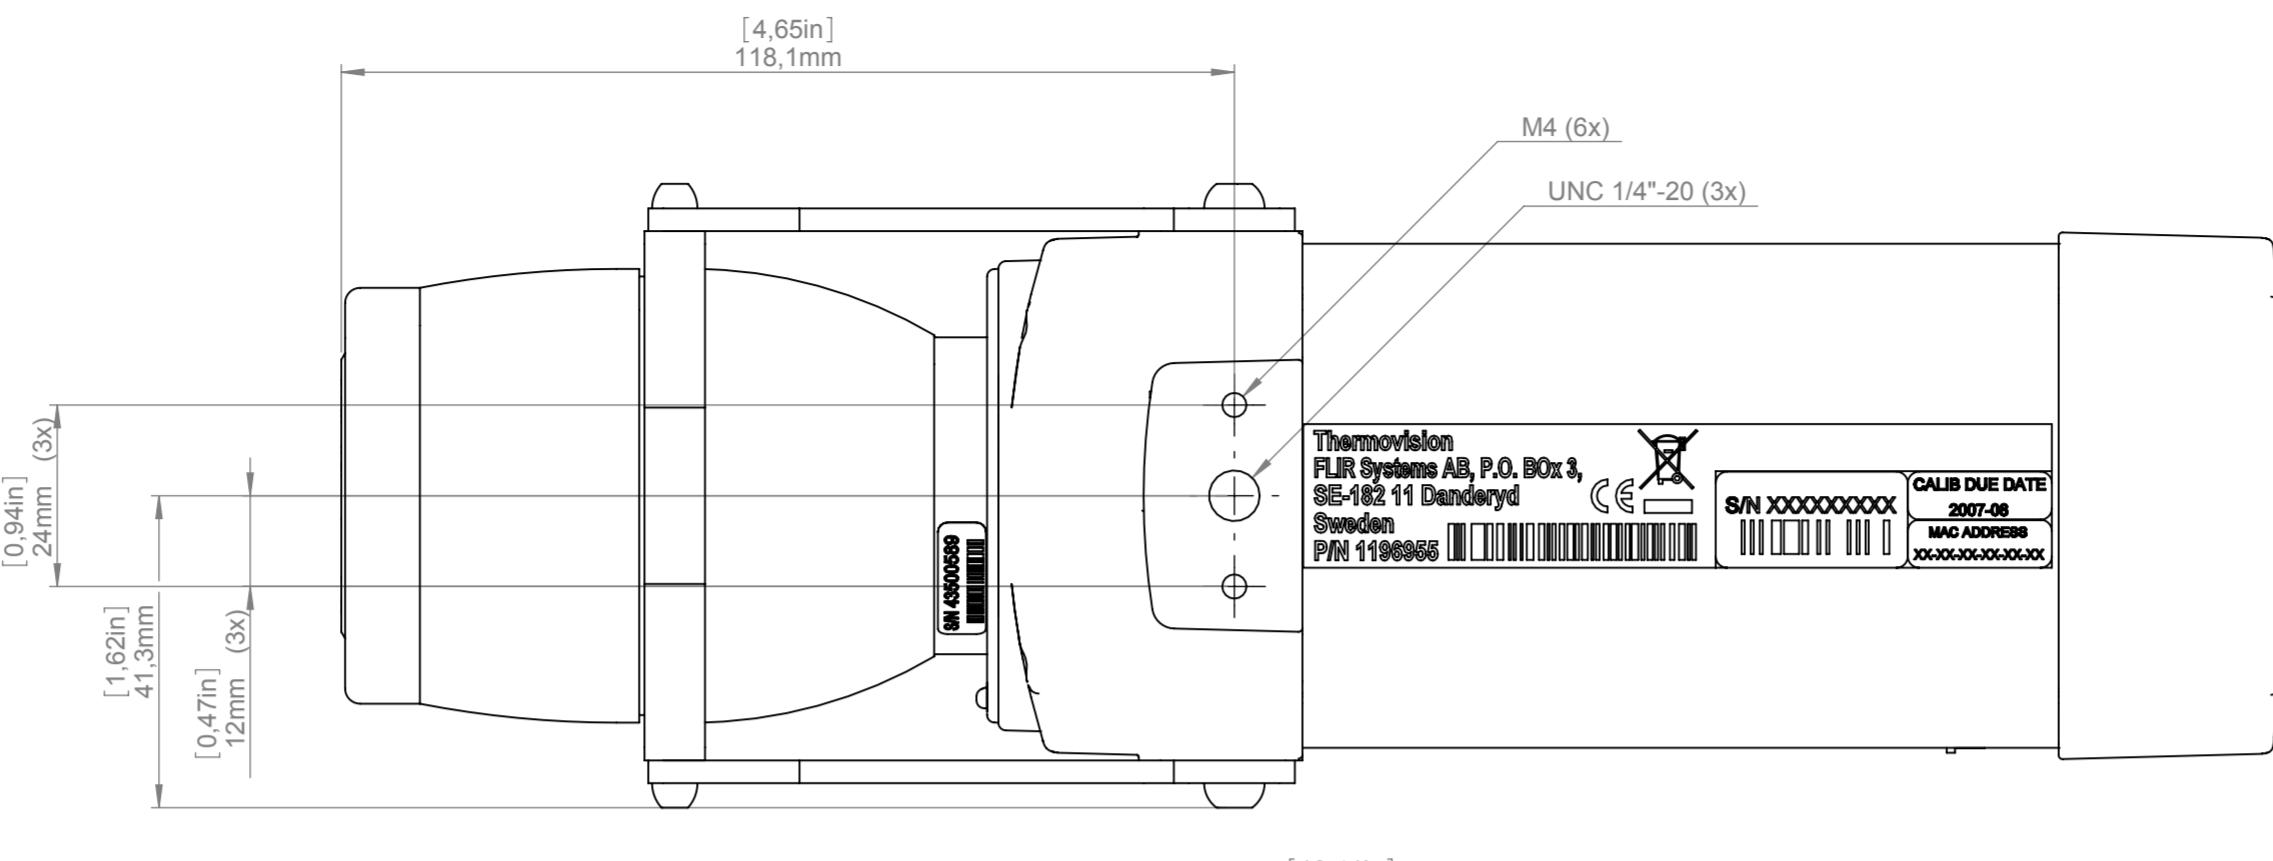

For additional dimensions see page 1

Modified 2012-04-18 | Check CAHA | Drawn by R&D Thermography

Denomination

Basic dimensions FLIR A3xx/SC3xx

Size A3
Scale 1:1
Drawing No. T125002
Sheet 2(8)
Size A



Camera with Lens IR f=10 mm (45°)

A

B

C

D

E

F

G

H

A

B







C

D

E

F

G

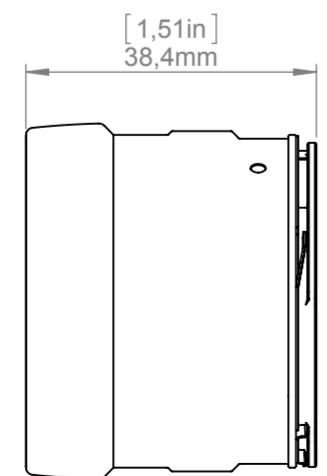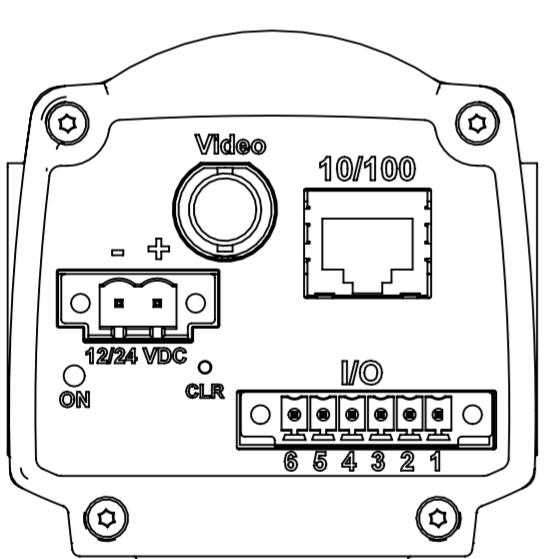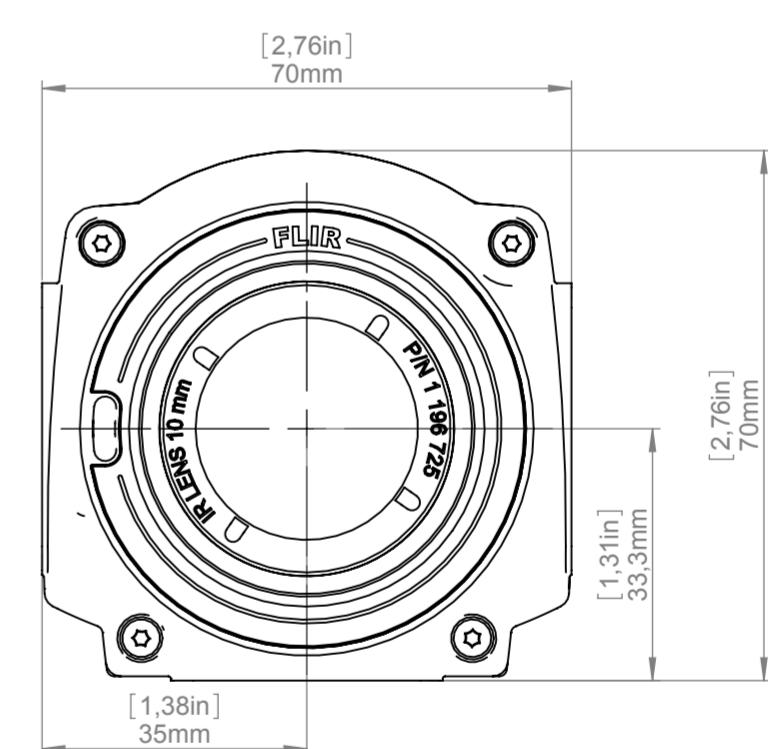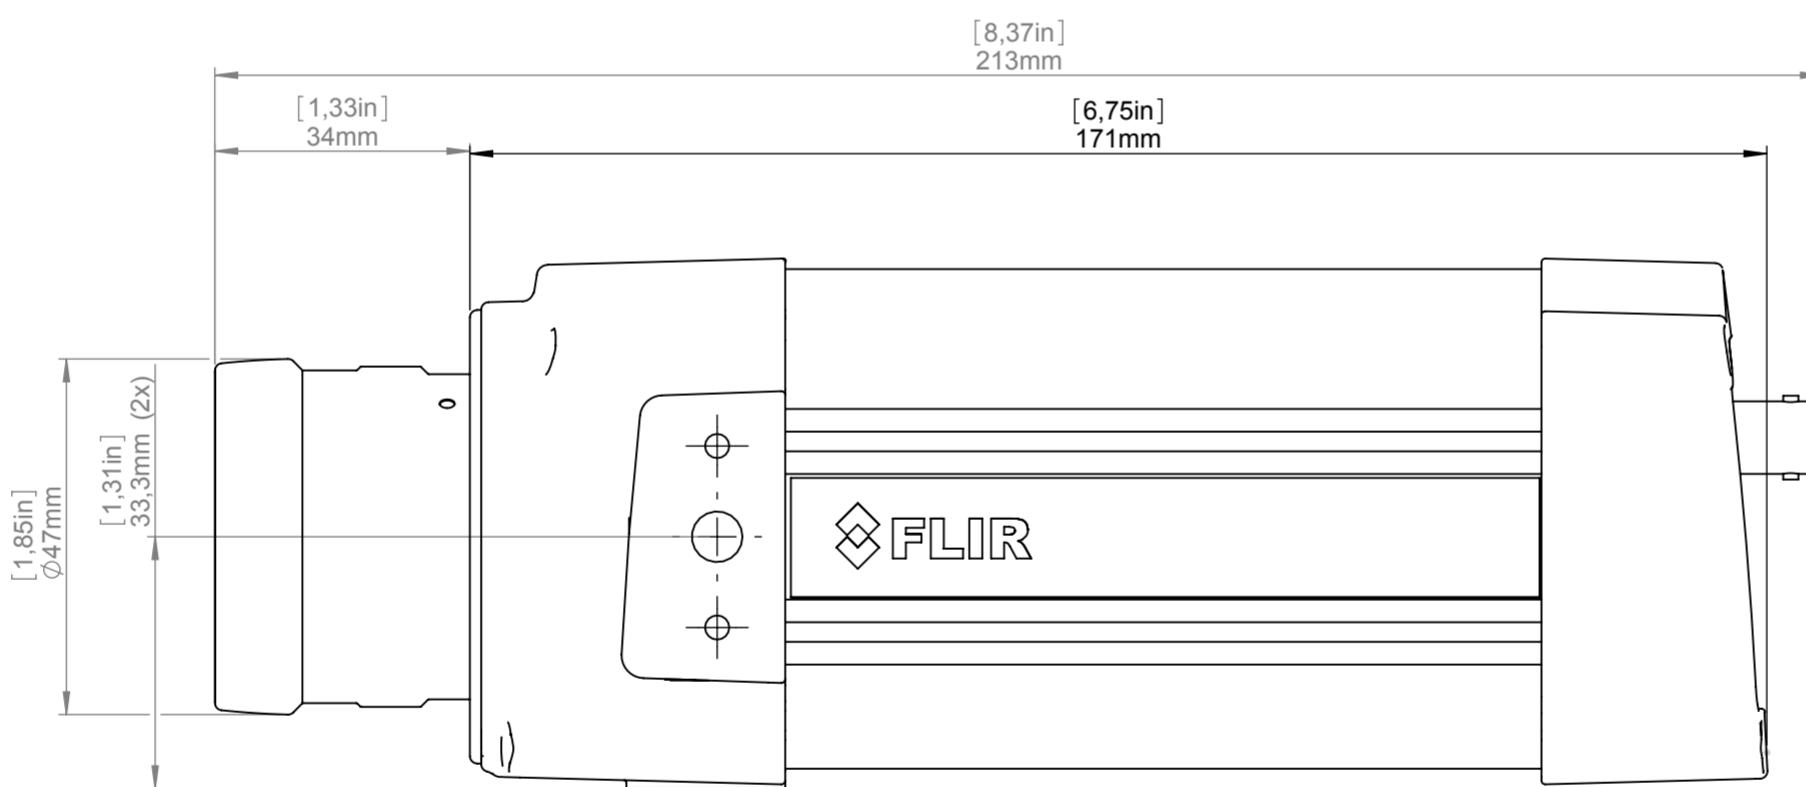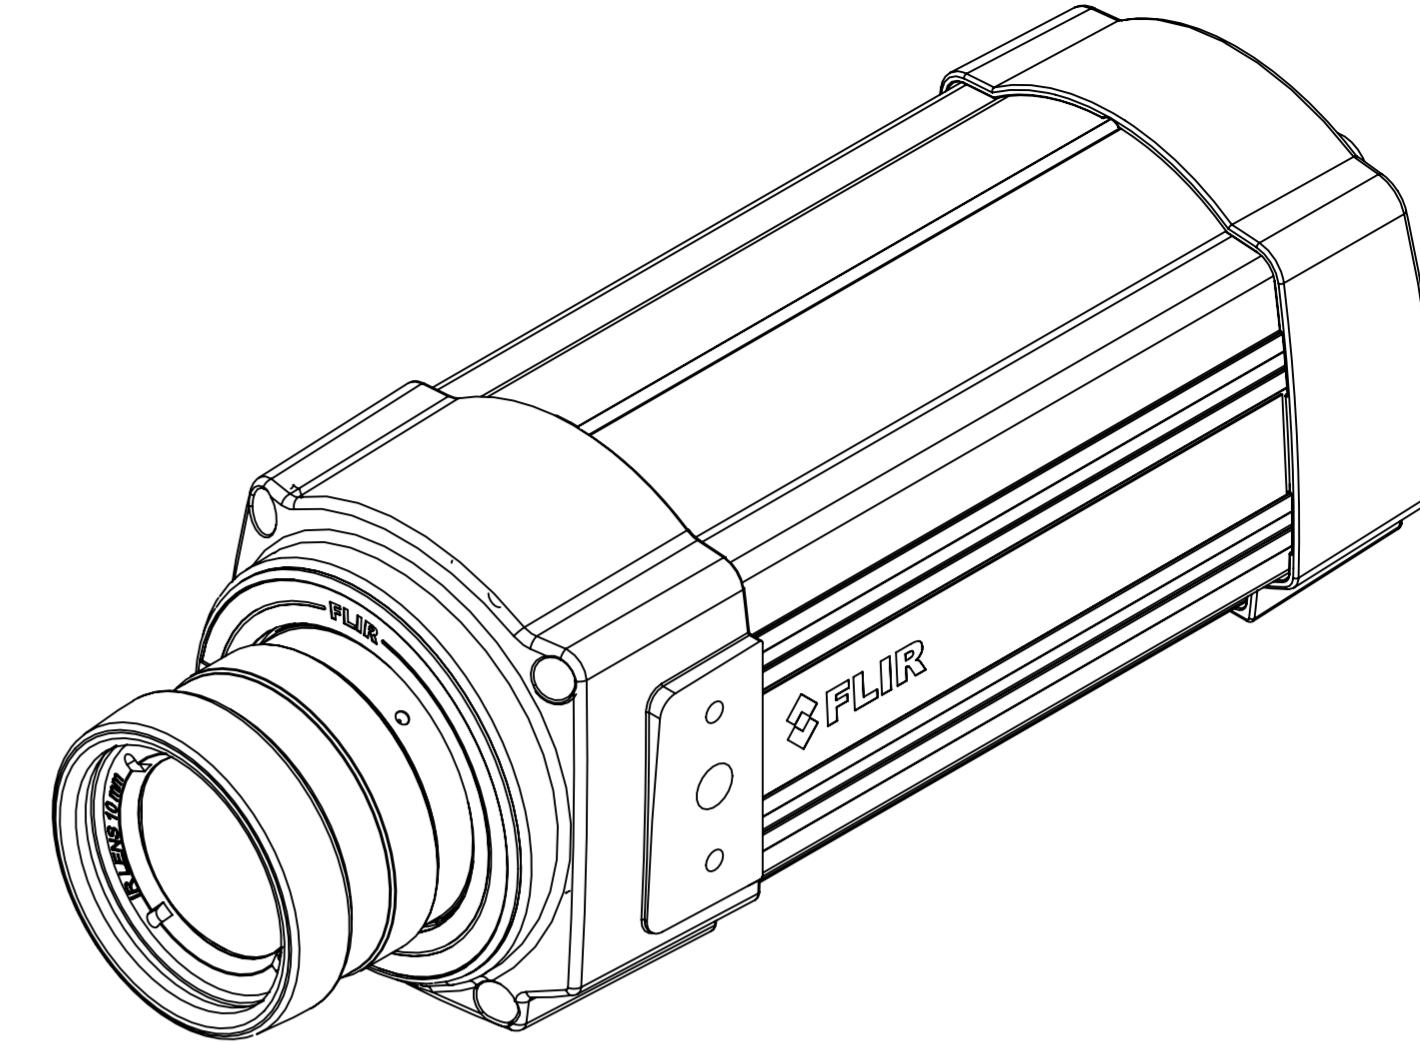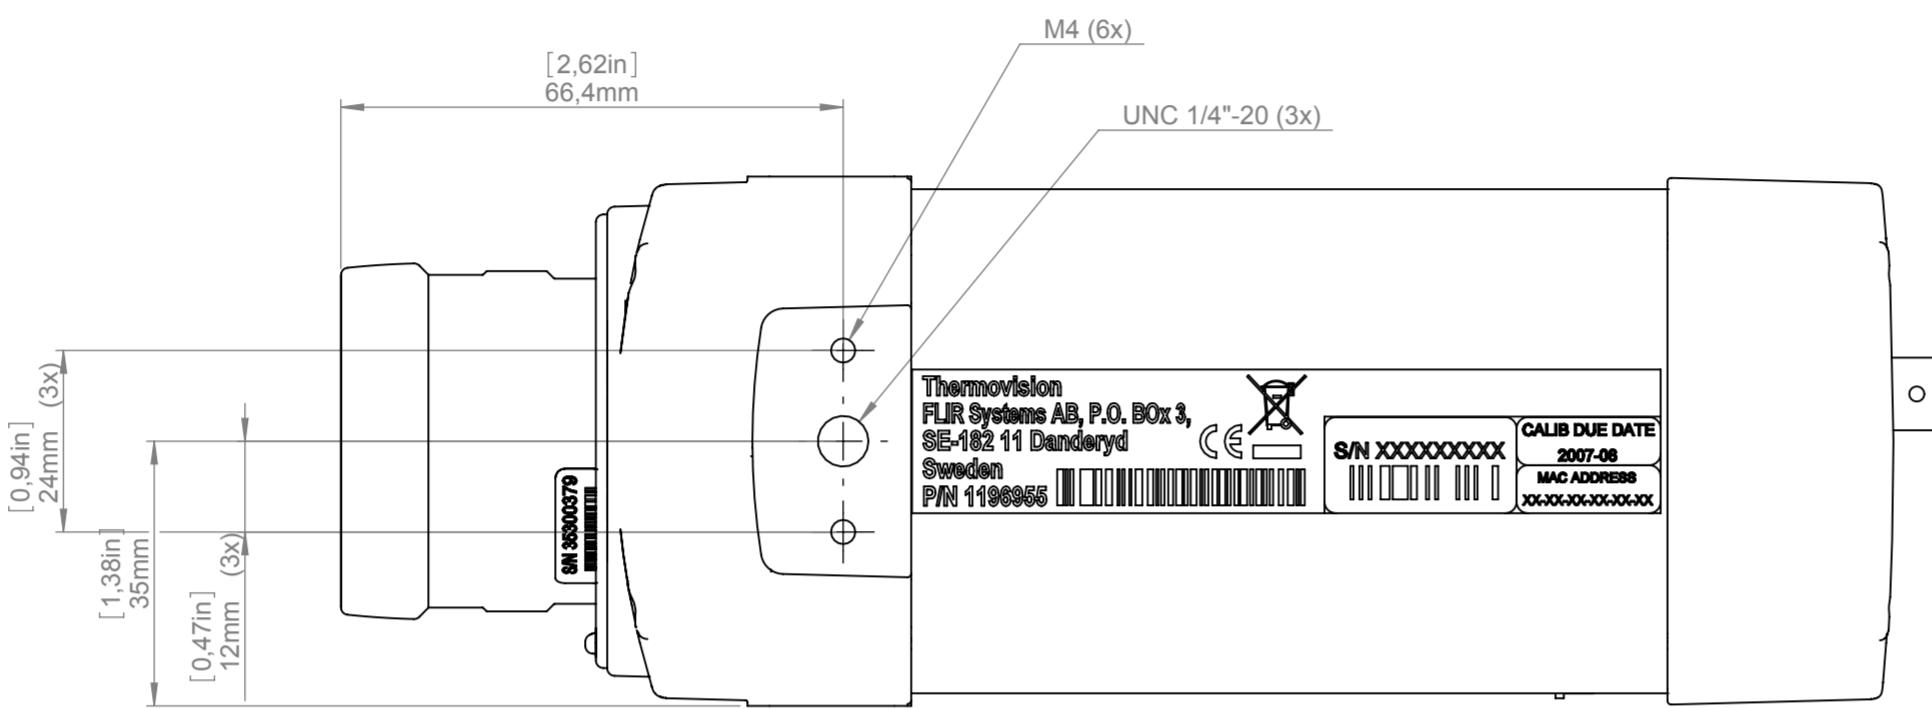

For additional dimensions see page 1

Modified 2012-04-18 Check CAHA Drawn by R&D Thermography

Denomination

Basic dimensions FLIR A3xx/SC3xx

Size A3
Scale 1:1
Drawing No. T125002
Sheet 3(8)
Size A

FLIR

Camera with Lens IR f=30 mm (15°)

A

B

C







D

E

F

G

H

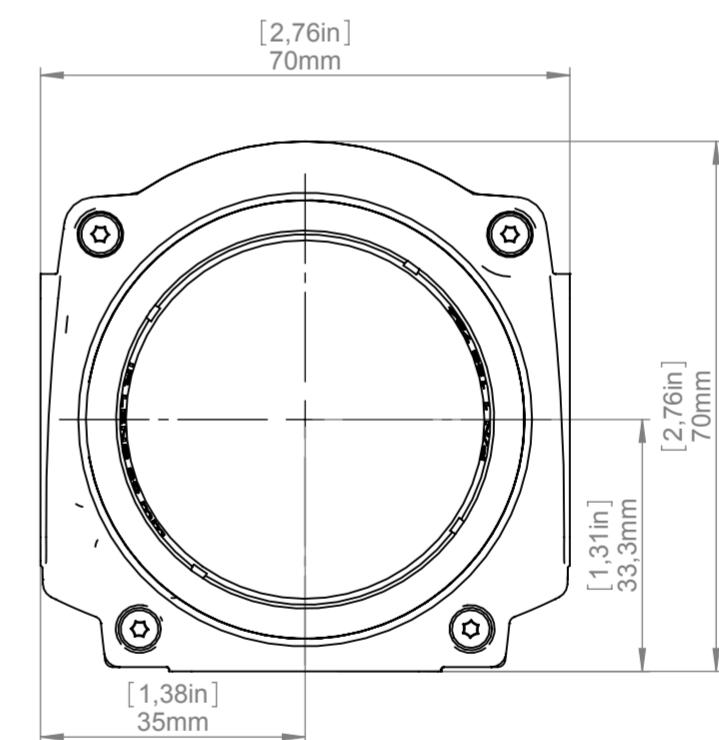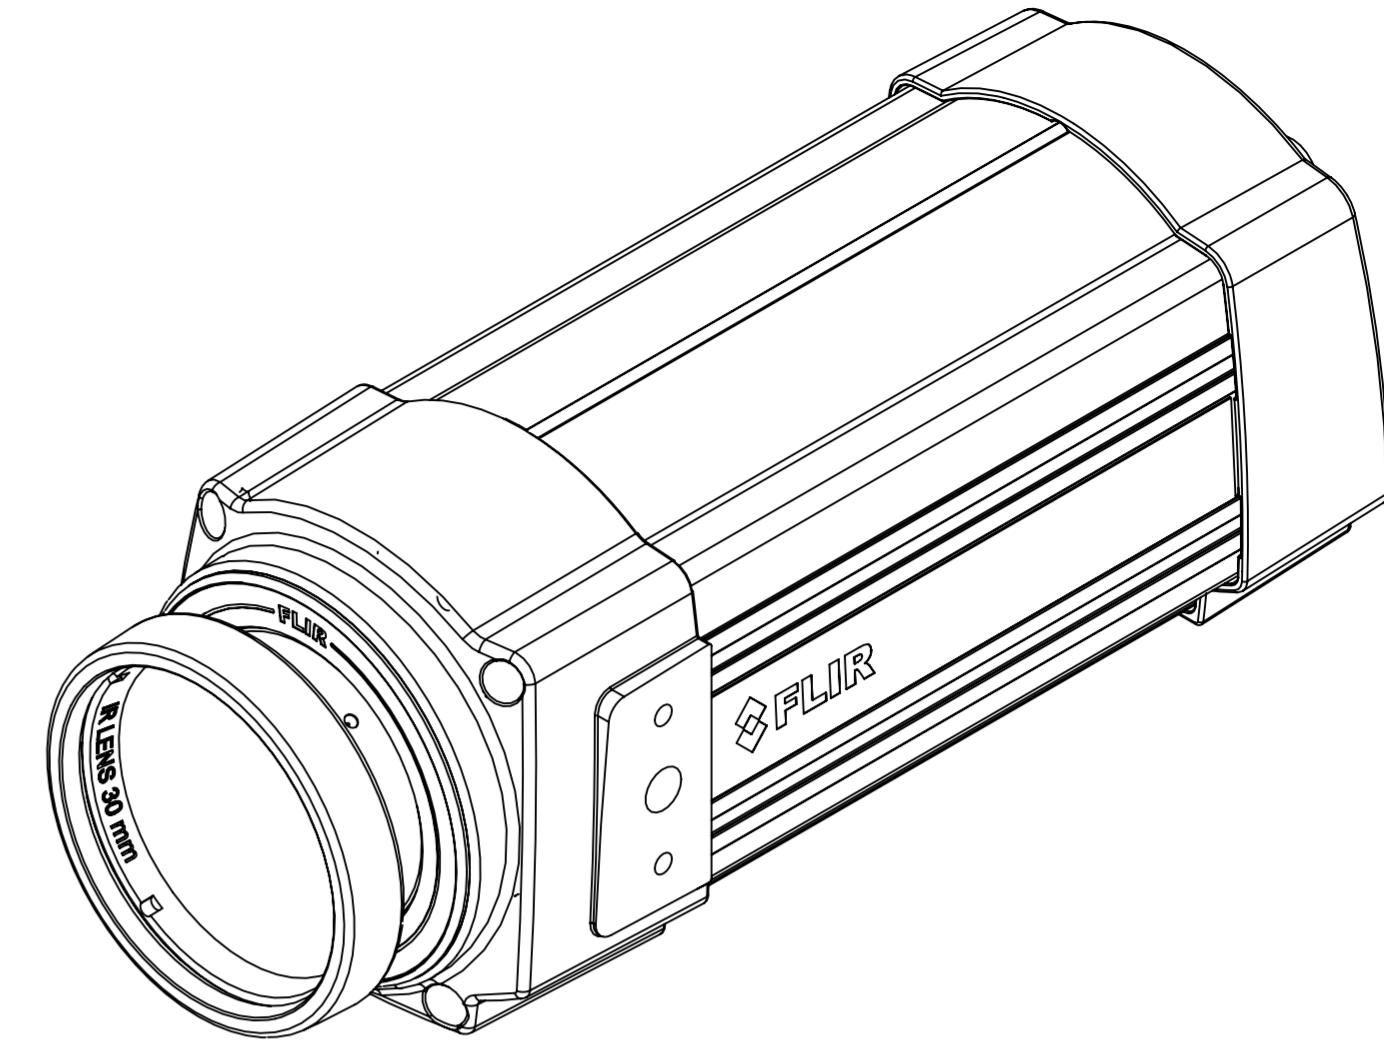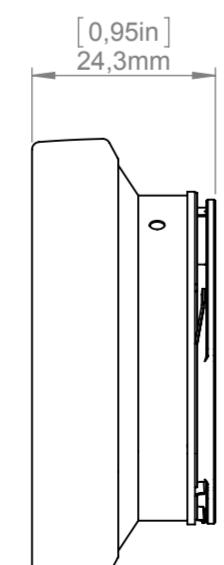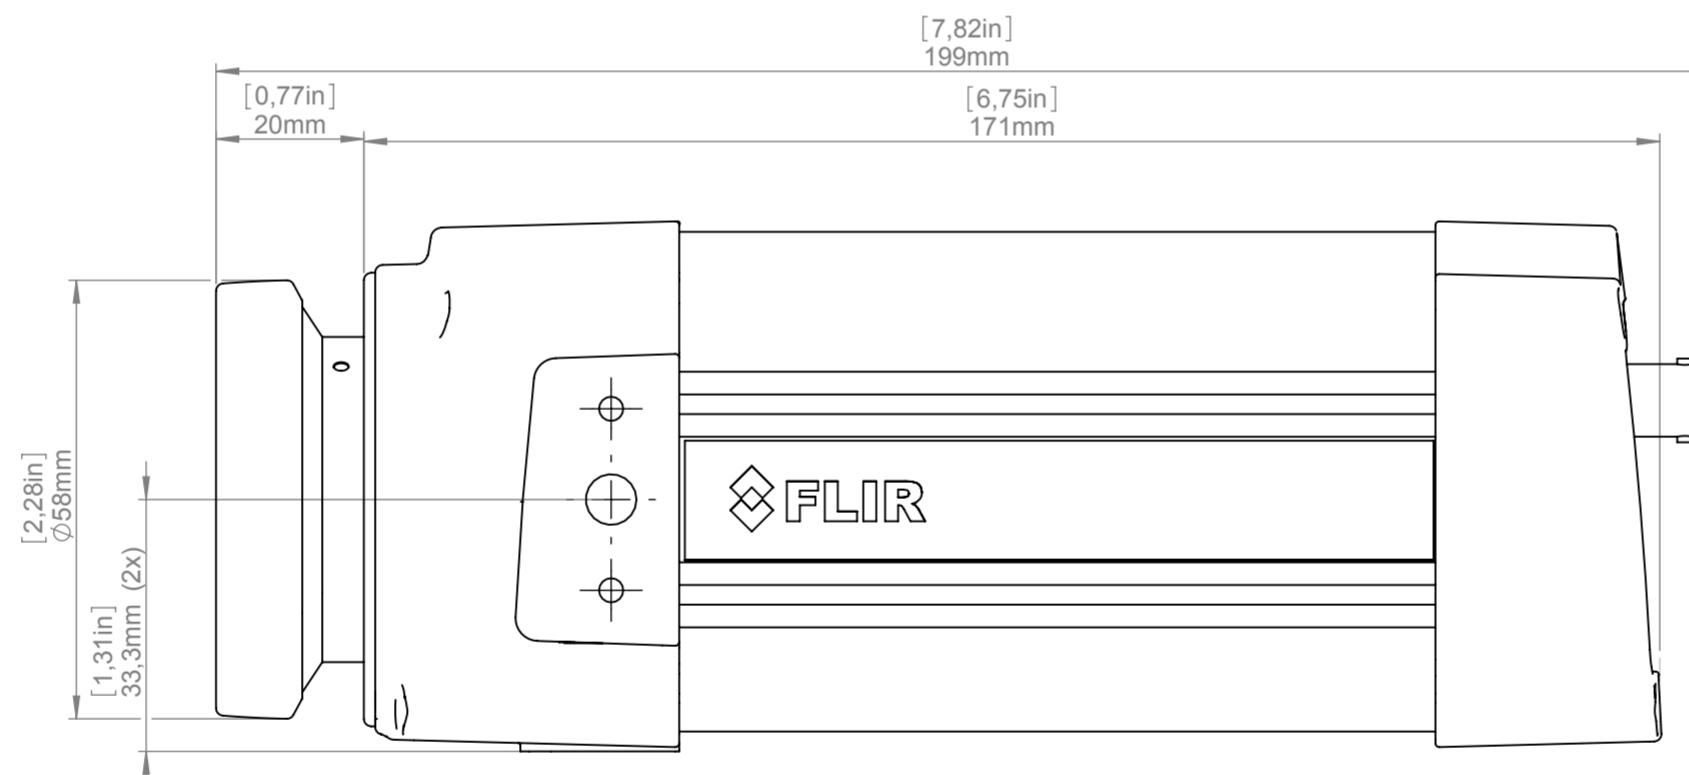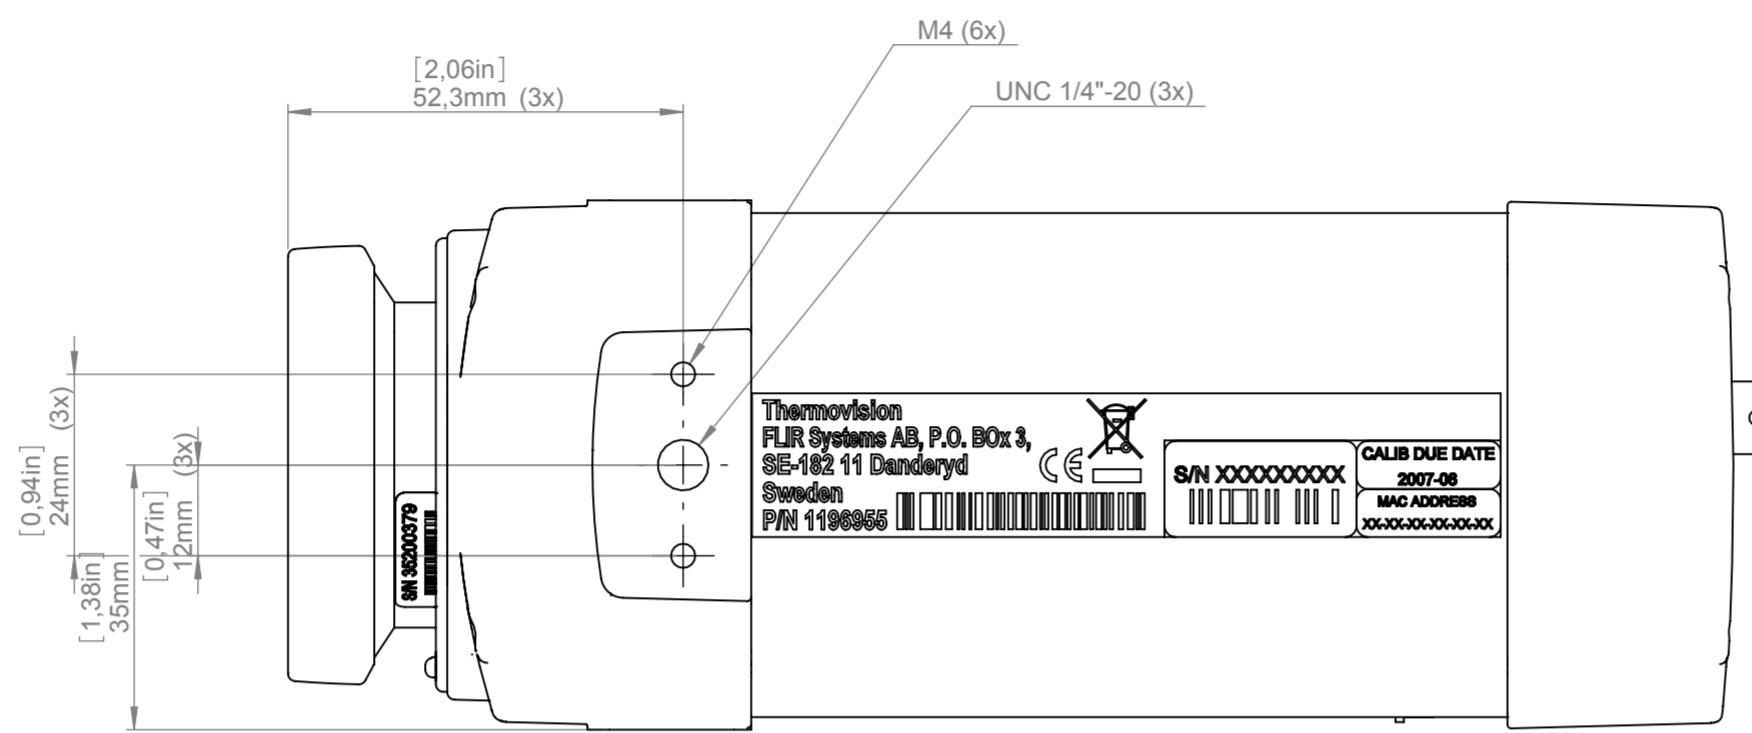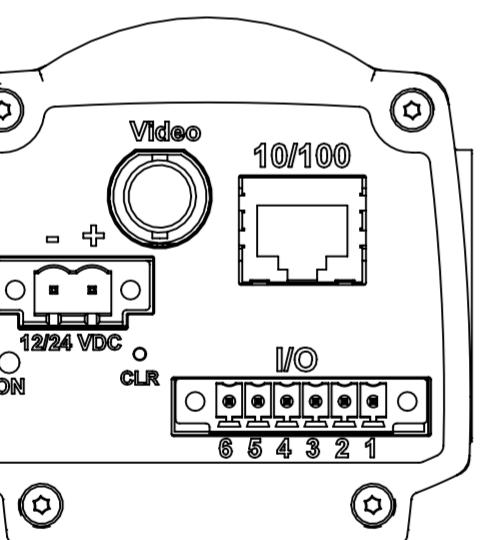

For additional dimensions see page 1

Modified 2012-04-18 Check CAHA Drawn by R&D Thermography

Denomination


Basic dimensions FLIR A3xx/SC3xx

Size A3
Scale 1:1
Drawing No. T125002
Sheet 4(8)
Size A

FLIR

Camera with Lens IR f=76 mm (6°) incl support


© 2012, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

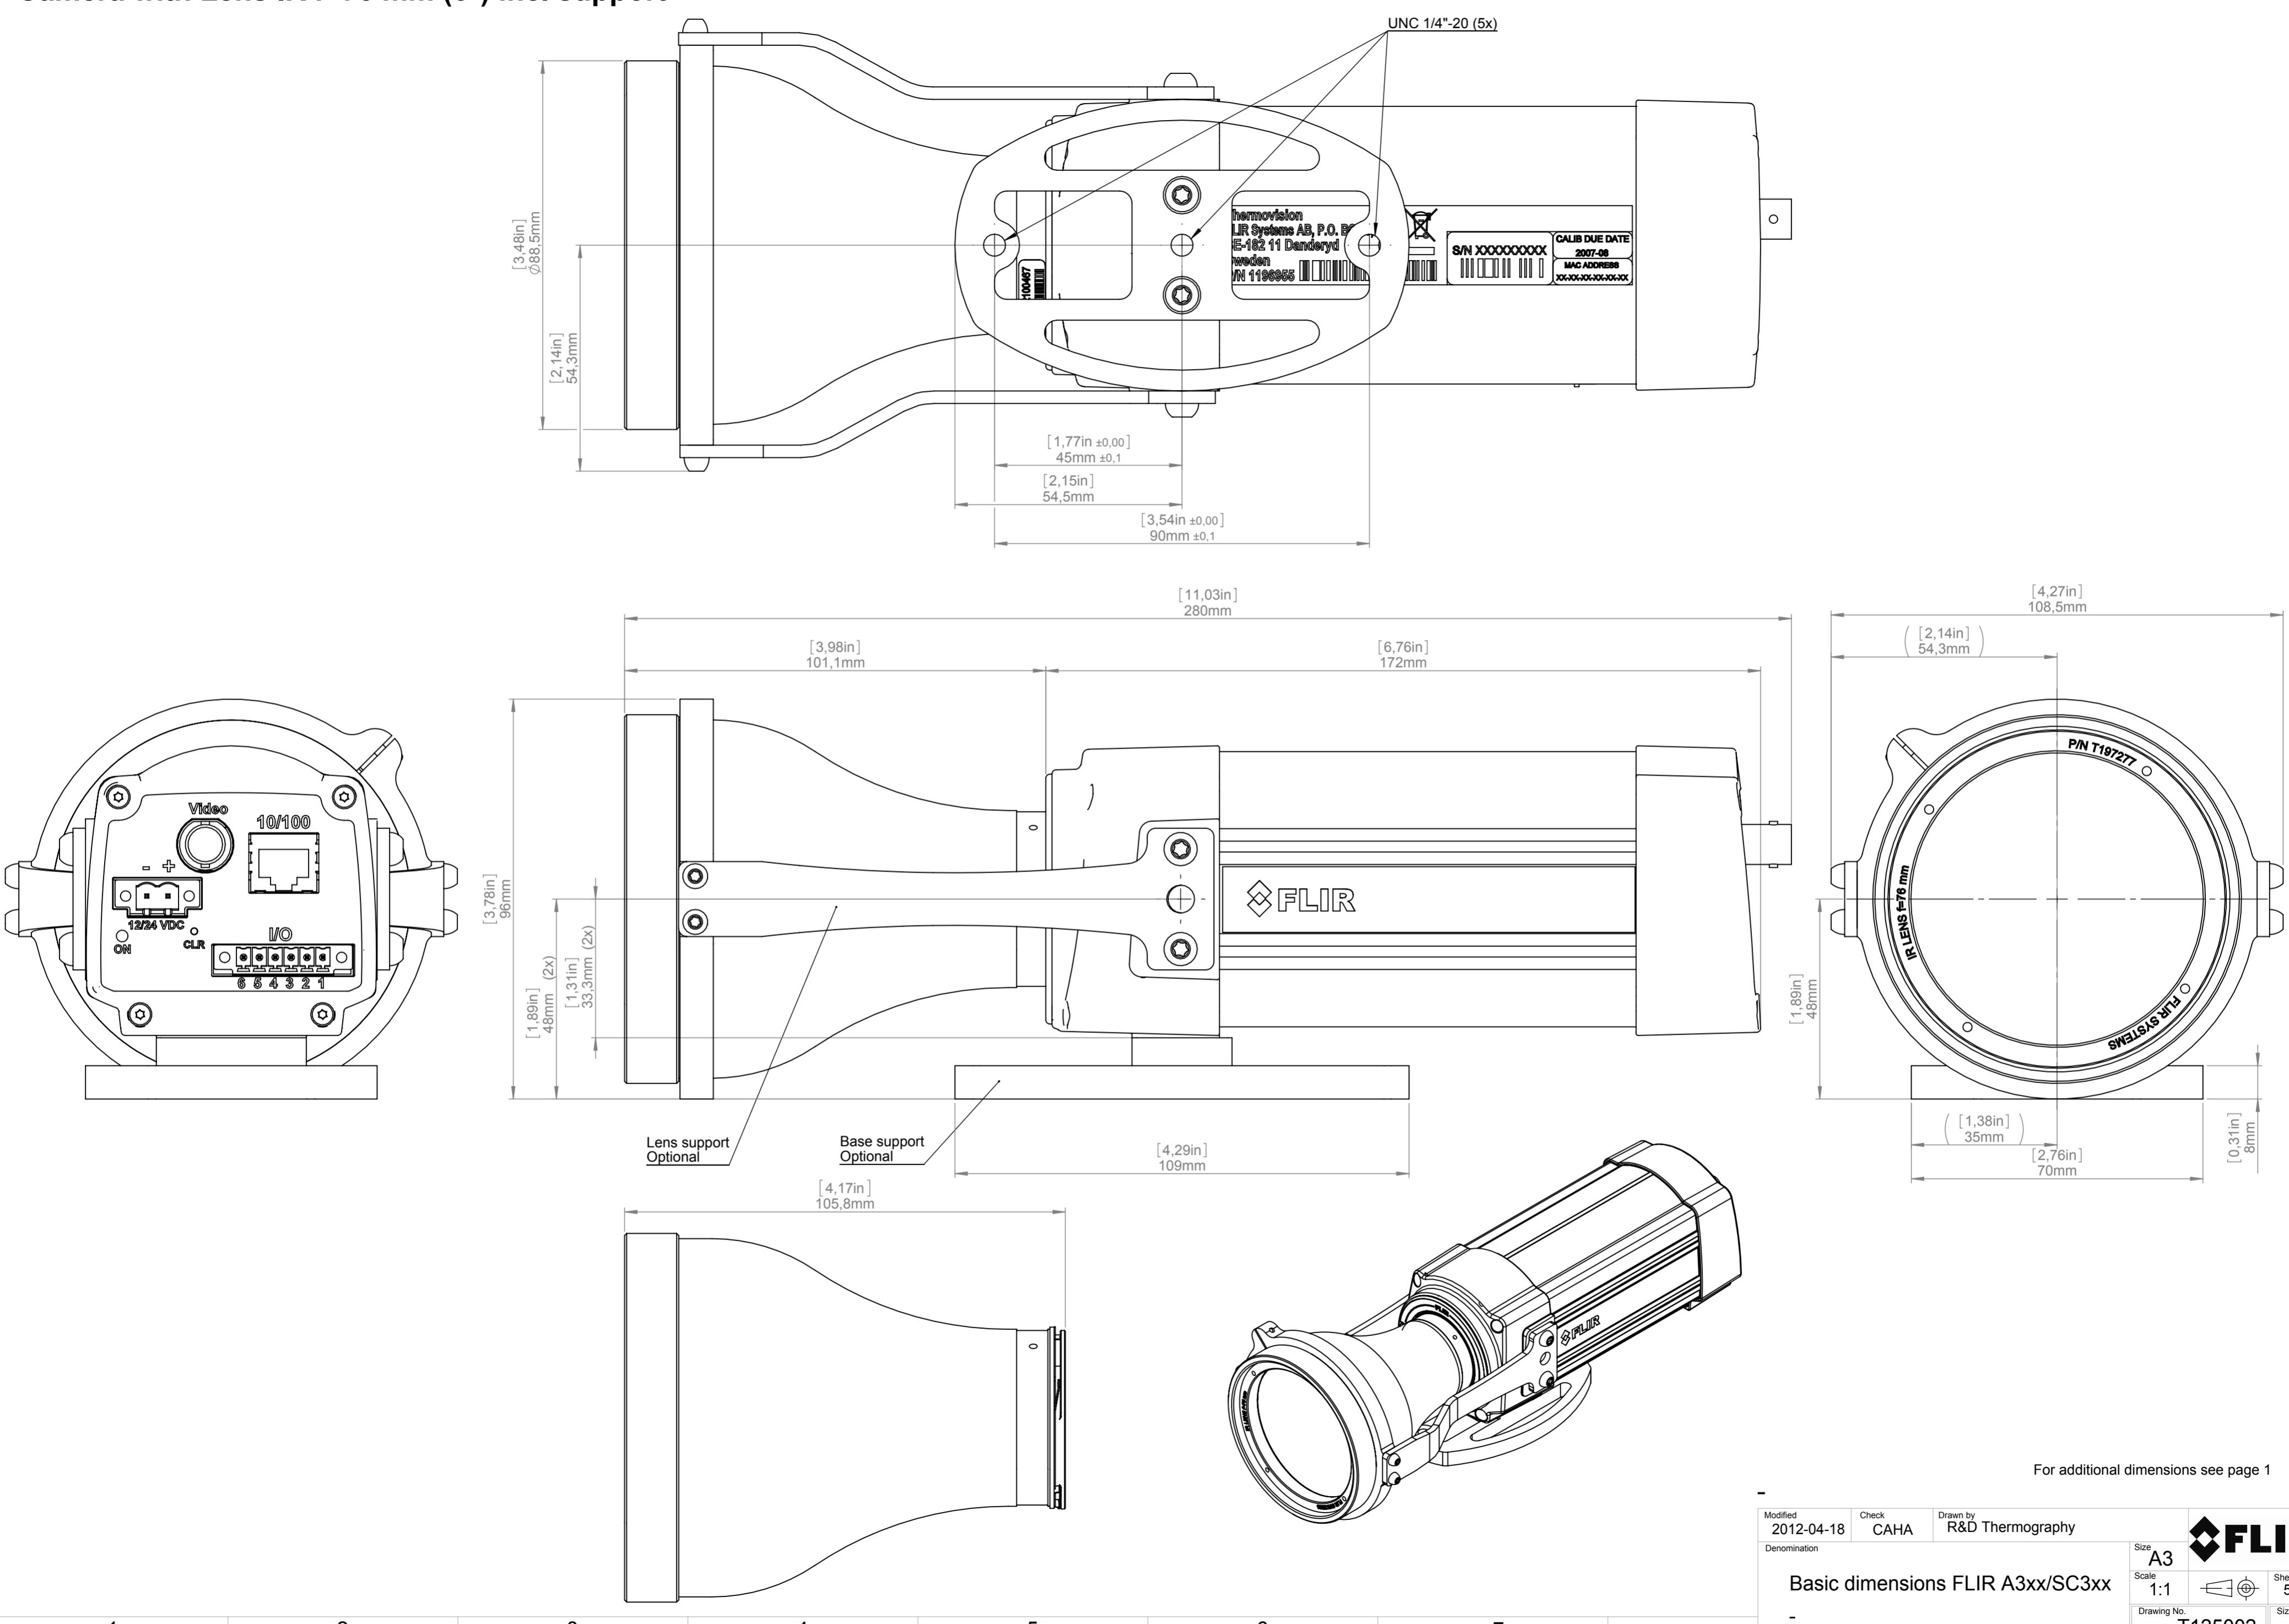

1 2 3 4 5 6 7 8 9 10

Camera with Close-up lens 1X (25 µm) incl support

©2012 FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without notice. Dimensional data is based on nominal values. Products may be subject to regional import considerations. License procedures may apply. Products may be subject to US Export Regulations. Please refer to exports@flir.com with any questions. Diversion contrary to US law is prohibited.

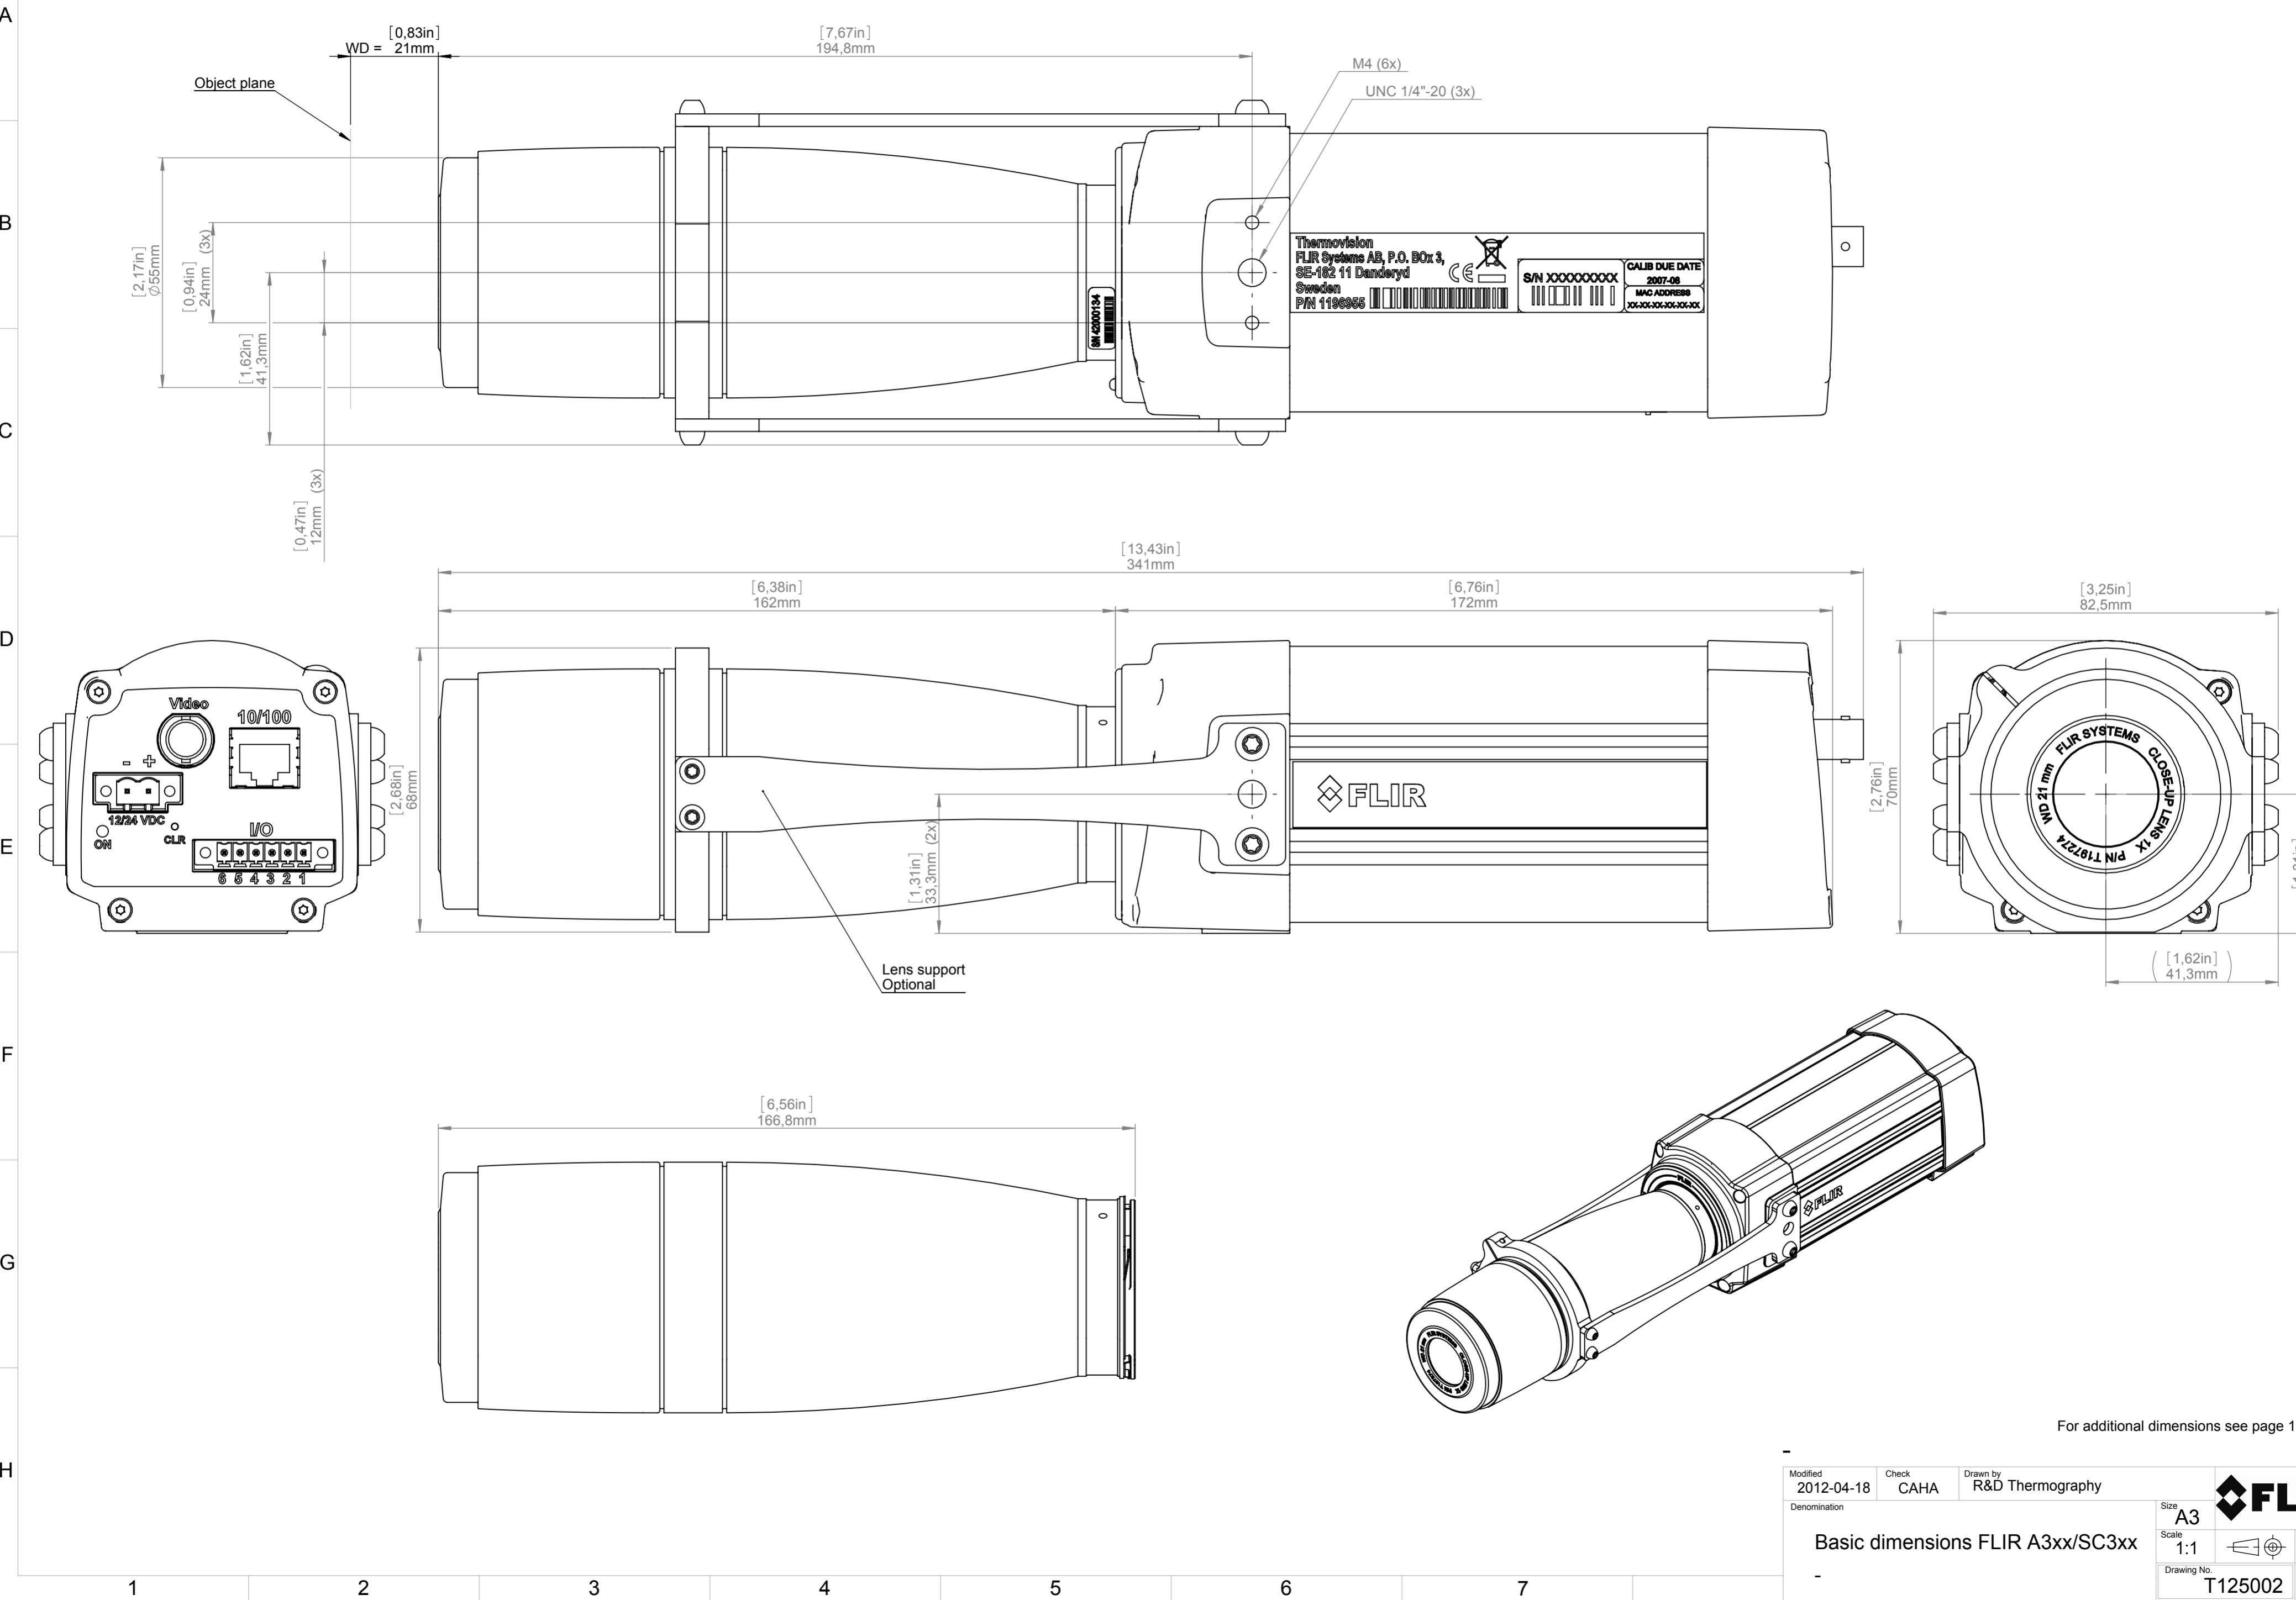

Camera with Close-up lens 2X (50 µm)

A

B

C

D

E

F

G

H

1

2

3

4

5







6

7

8

9

10

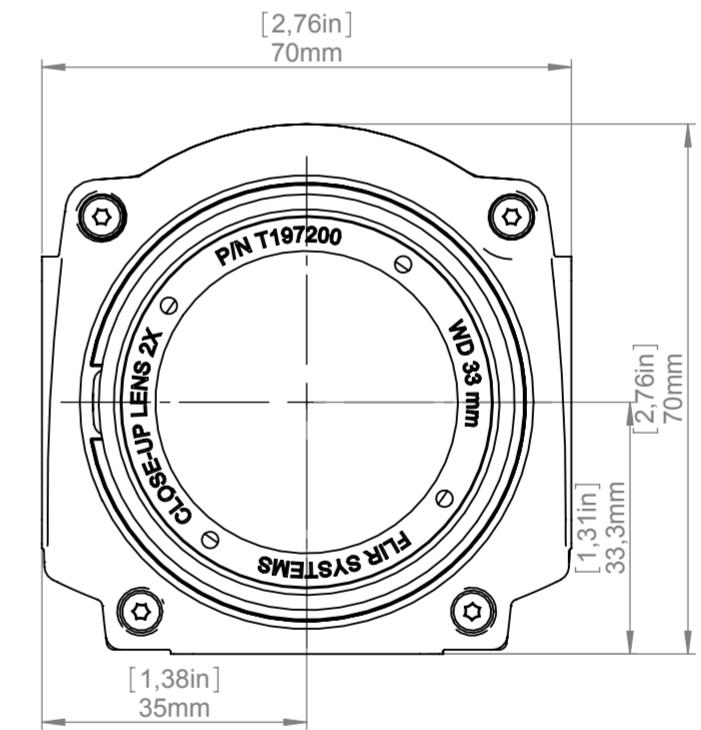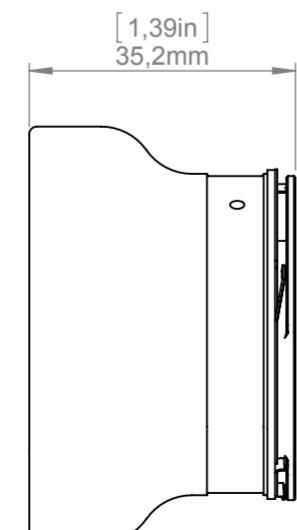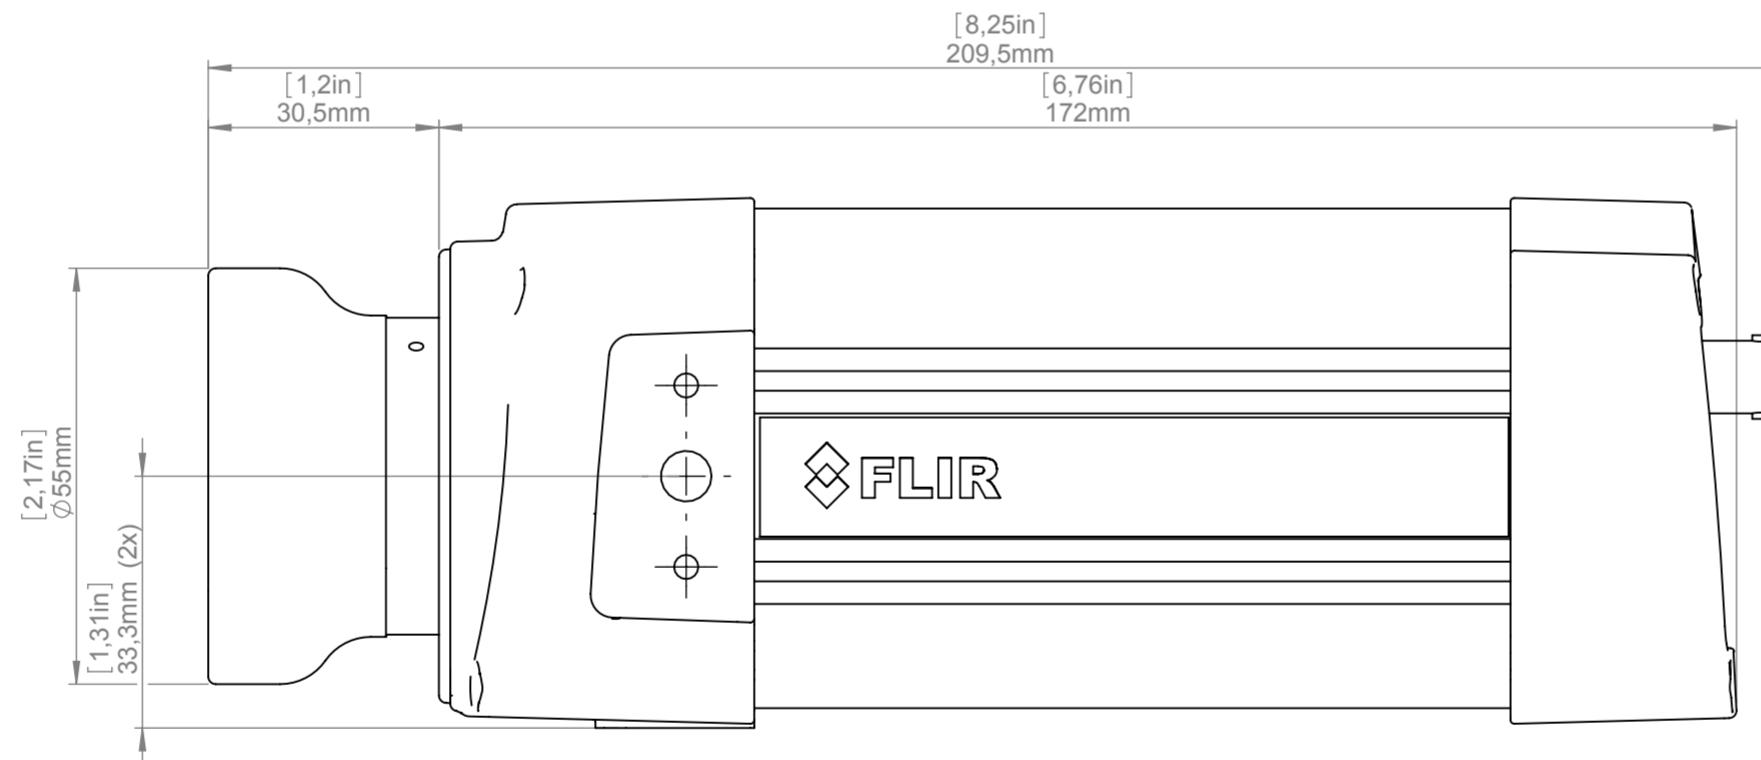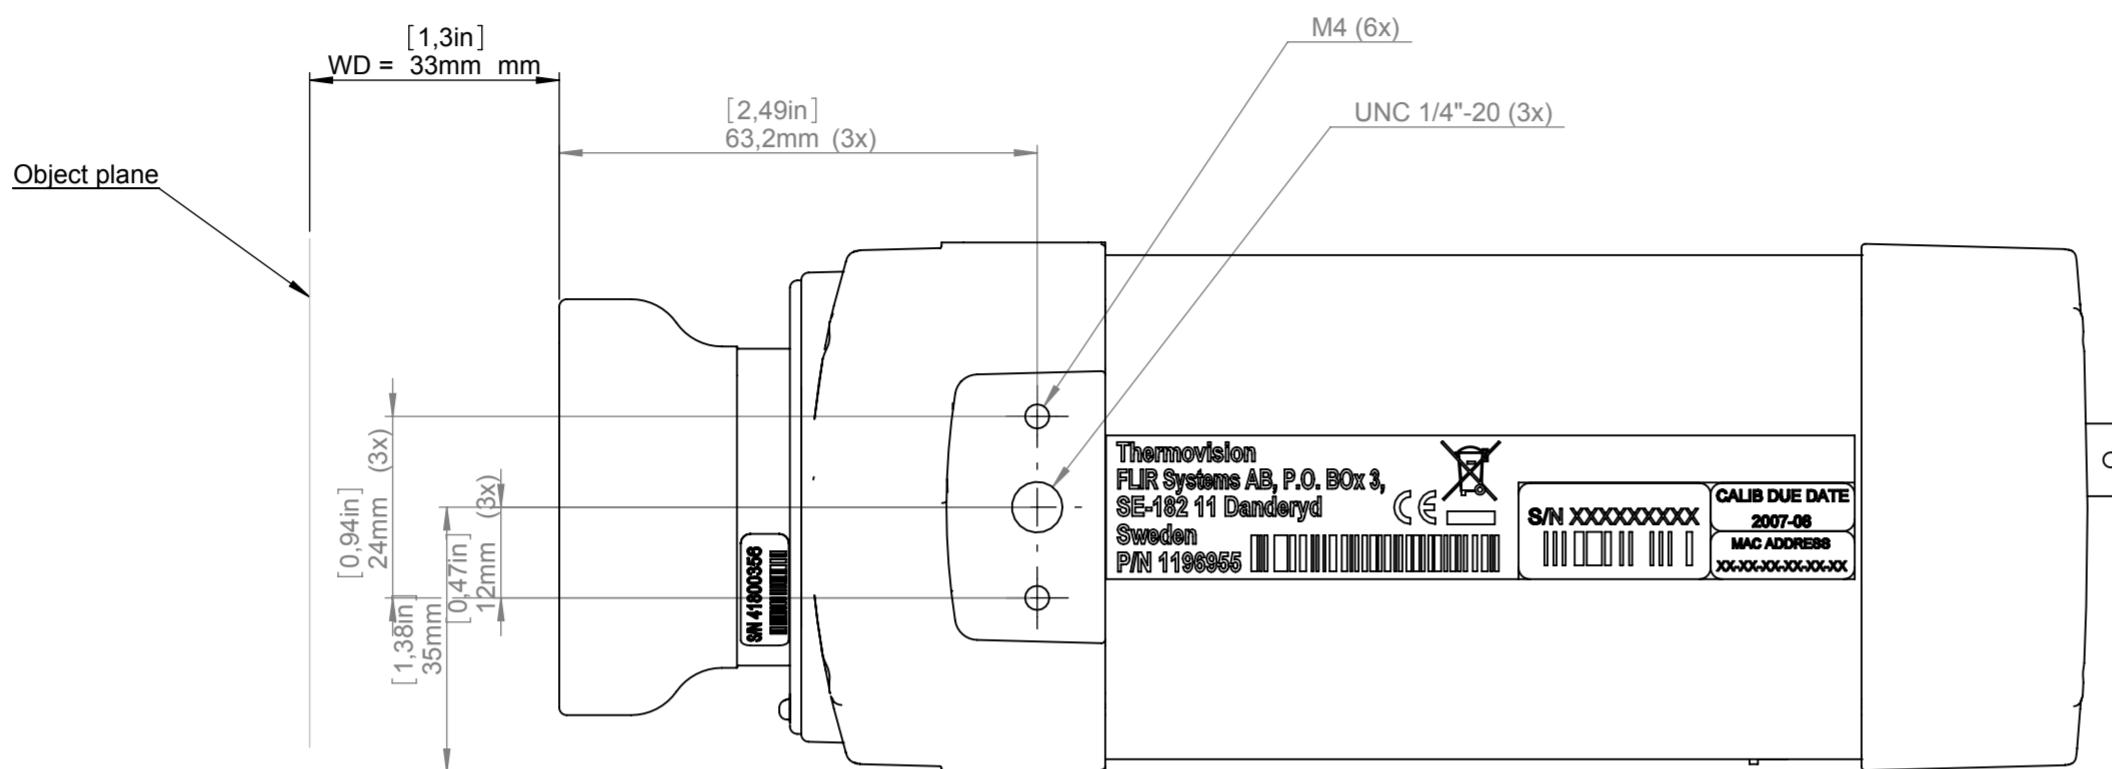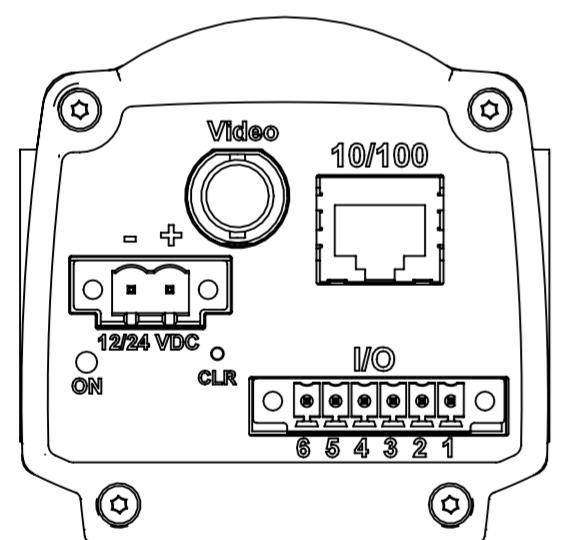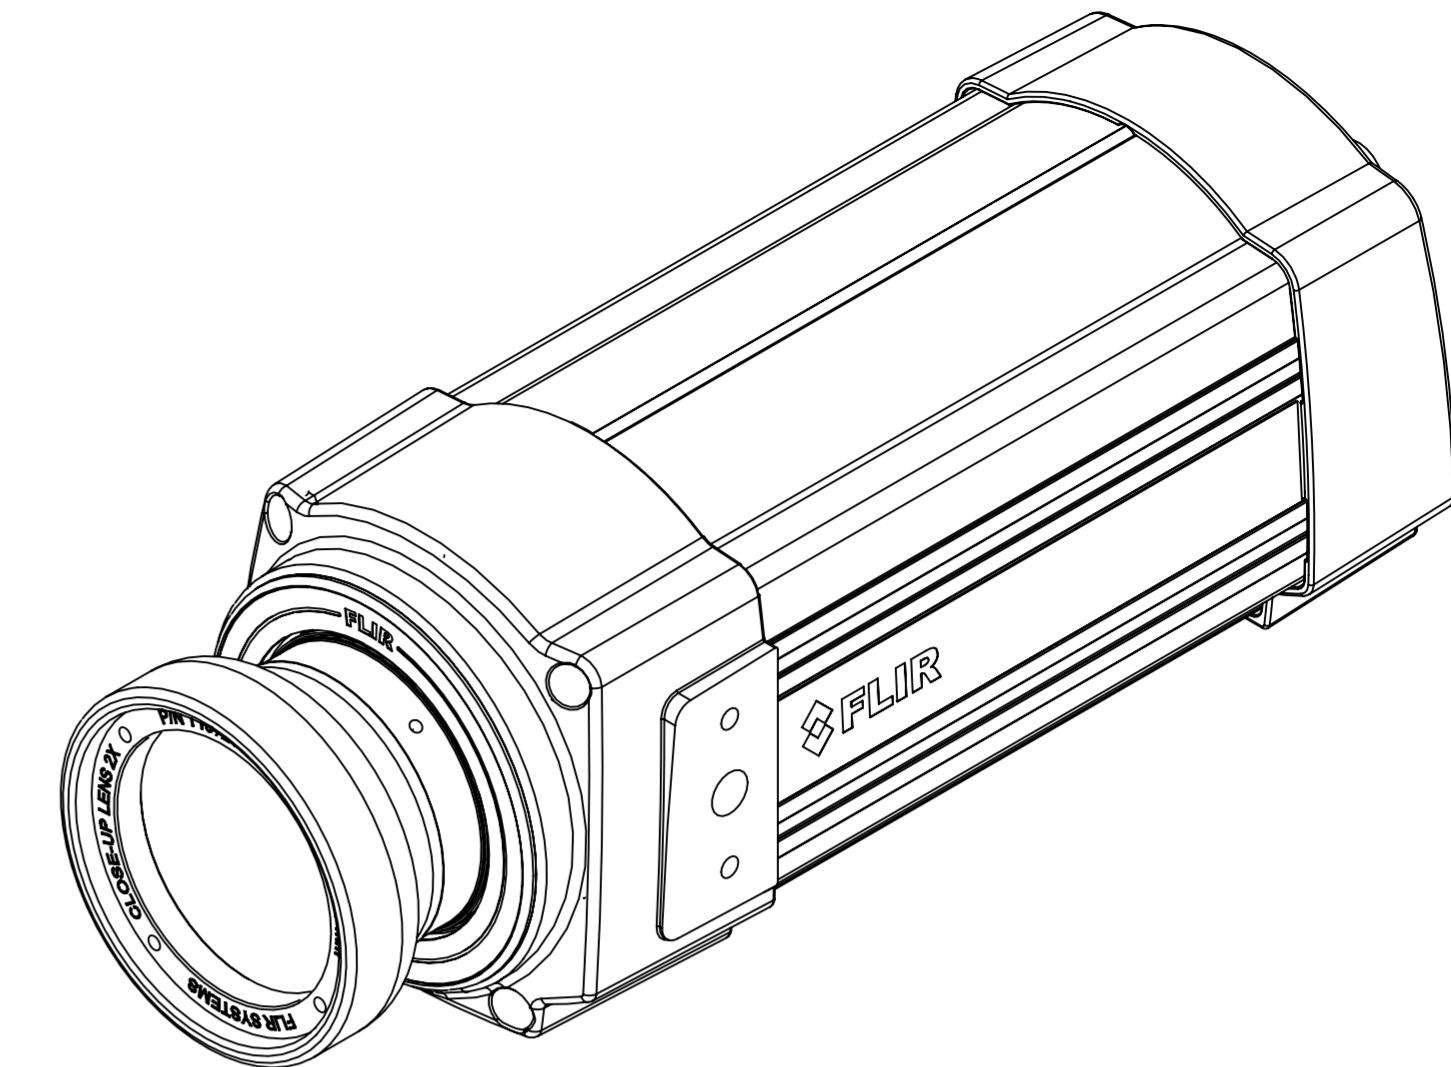

For additional dimensions see page 1

Modified 2012-04-18 Check CAHA Drawn by R&D Thermography

Denomination

Basic dimensions FLIR A3xx/SC3xx

Size A3
Scale 1:1
Drawing No. T125002
Sheet 7(8)
Size A



Camera with Close-up lens 4X (100 µm)

A

B

C

D

E

F

G

H

1

2

3

4

5







6

7

8

9

10

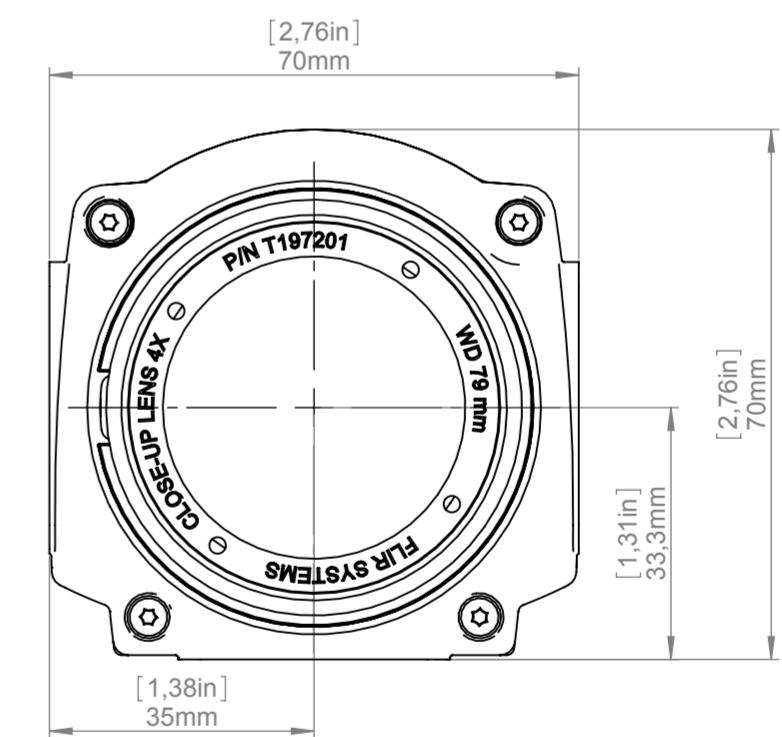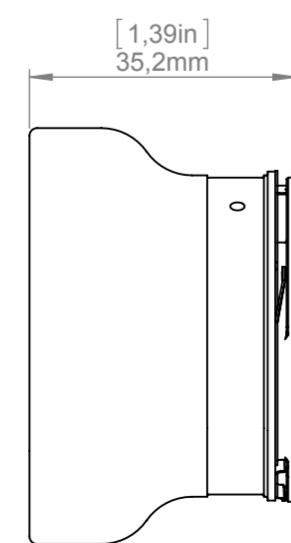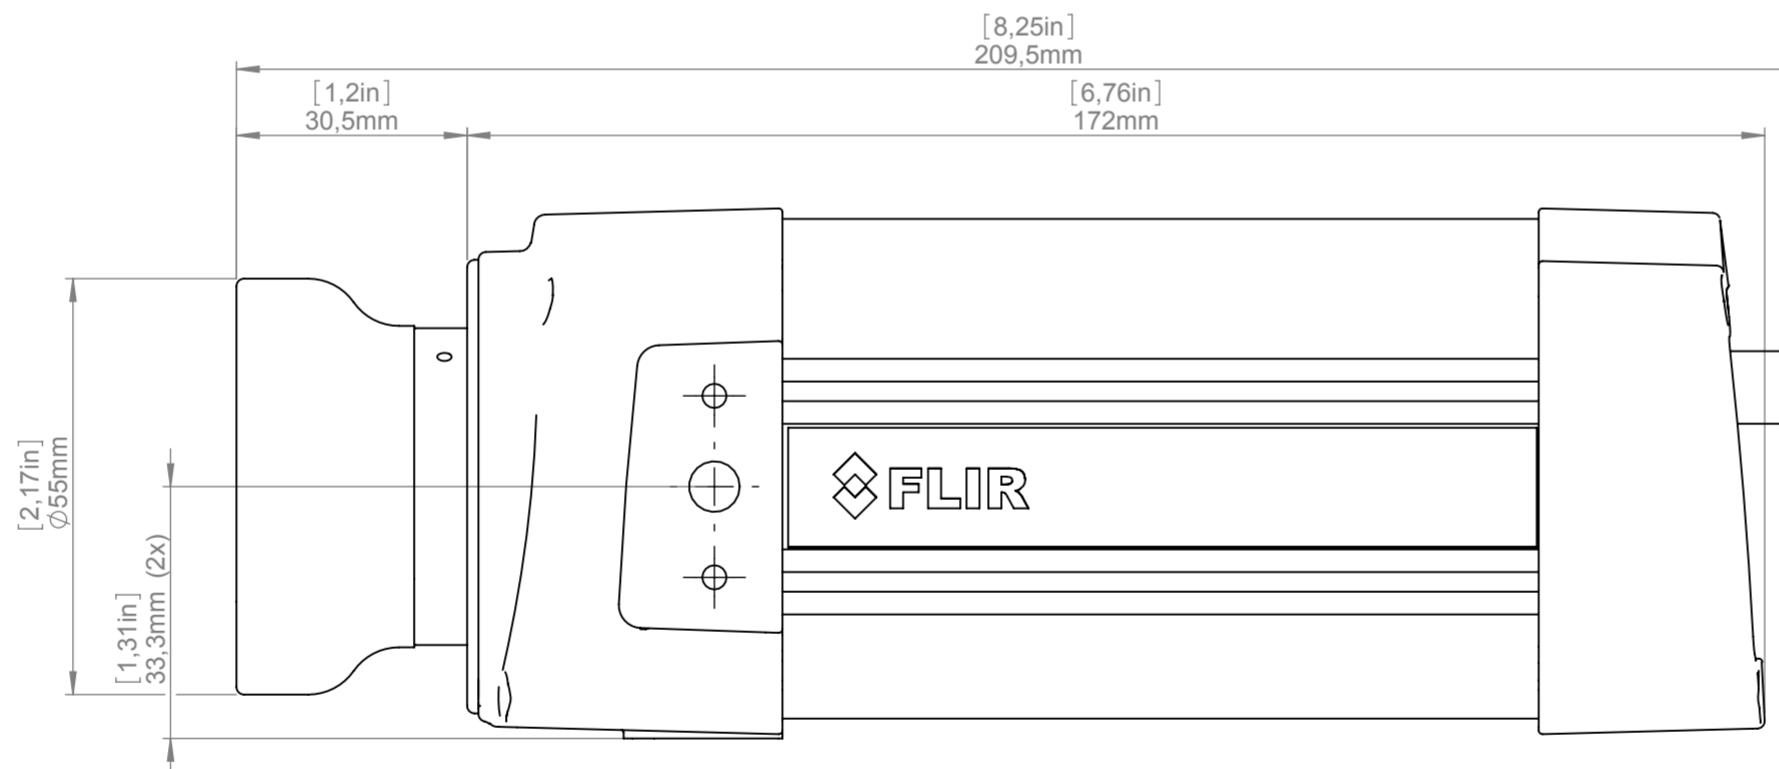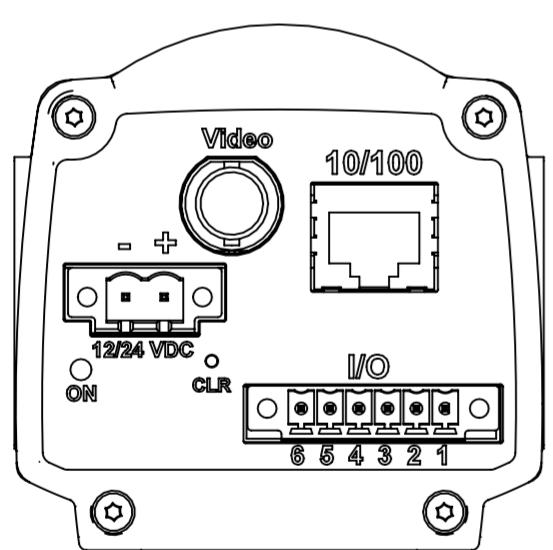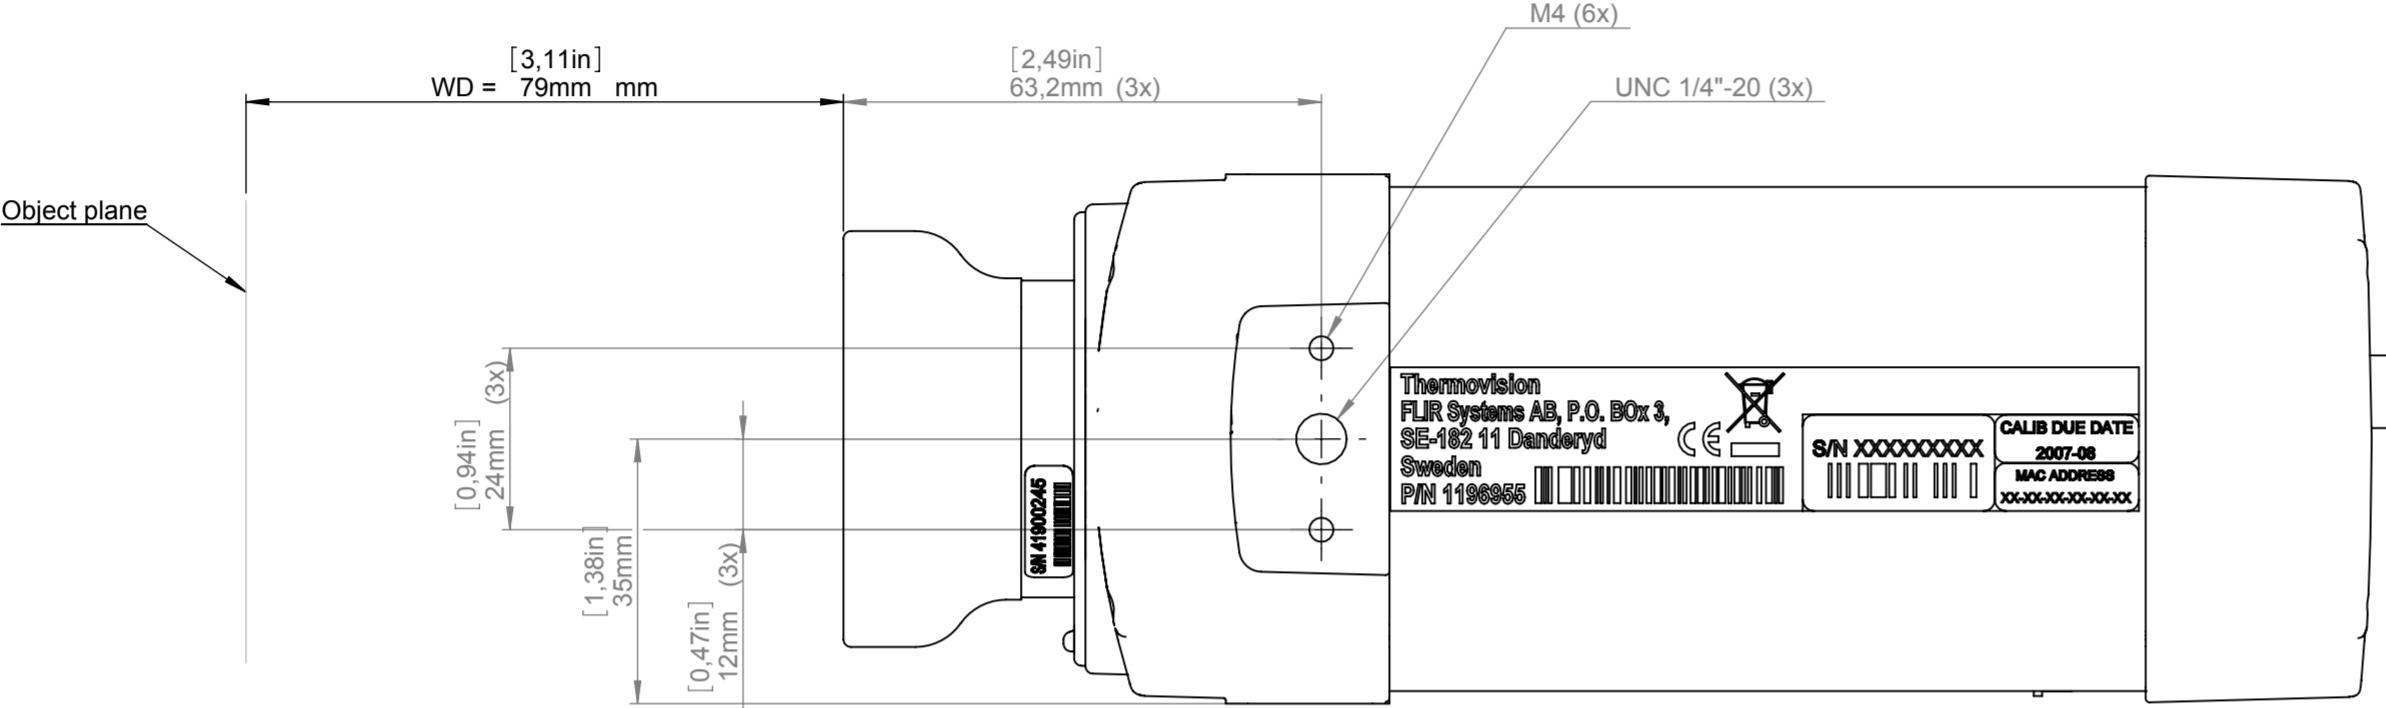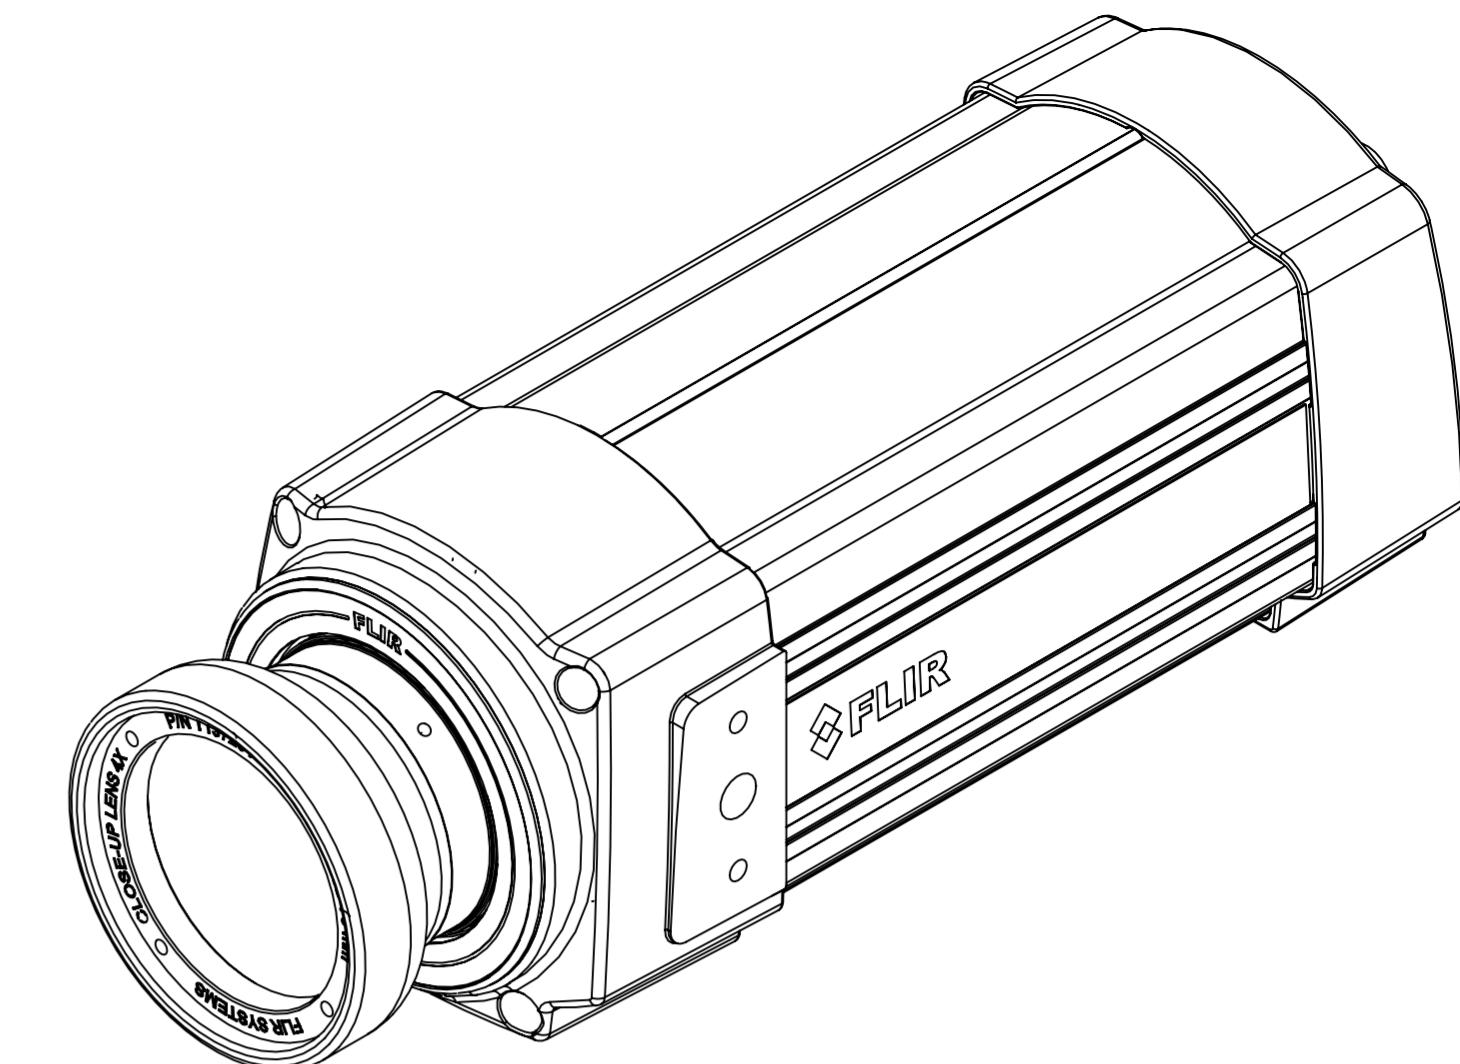

For additional dimensions see page 1

Modified 2012-04-18 Check CAHA Drawn by R&D Thermography

Denomination

Basic dimensions FLIR A3xx/SC3xx

Size A3
Scale 1:1
Drawing No. T125002
Sheet 8(8)
Size A

