



PHANTOM[®]

Miro C

DATASHEET



C320J Back



PHANTOM Miro[®] C320J Miro C320

COMPACT
HIGH-SPEED CAMERAS

1,480 fps at full HD (1920 x 1080) resolution

Small and rugged

Flexible, with 2 models

FEATURES & BENEFITS

THE COMPACT AND FLEXIBLE SOLUTION FOR AUTOMOTIVE CRASH TEST

- HD resolution for more detail, in a convenient, small form factor.
- 2 body types for specific system needs - the C320J for multi-camera set-ups with the Miro Junction Box, and the C320, for stand-alone use, or connected to the JBox with an adapter. They blend perfectly with Phantom off-board cameras for a full family solution.
- Proven design and independently tested rugged up to 170G. Tough, easy-to-use single cable system to Junction Box.

FOCUS ON DATA PROTECTION AND MANAGEMENT

- Internal, non-removable battery for data protection in case of power loss
- 240GB of internal Flash keeps data safe
- 8GB or 16GB of RAM, with up to 63 partitions for multiple shots

FRAME RATES & EXPOSURE	
Top FPS at Max Resolution	1,480
Maximum FPS	94,510
Minimum FPS	100
CAR Increments	640 x 8
Minimum Exposure	1 μ s
Electronic Shutter	Global Shutter
PIV Features	Shutter-off mode straddle time = 1160ns Supports Burst Mode
Exposure Features	Auto Exposure

IMAGING	
Sensor Type	CMOS
Maximum Resolution	1920 x 1080
Bit Depth	10-bit
Pixel Size	10 μ m
Sensor Size	19.2 x 10.8 mm; 22.03 mm diagonal
ISO Daylight (12232 STD)	Mono 10,000; Color 2,000
ISO Tungsten (12232 STD)	Mono 25,000; Color 2,500
Exposure Index	10,000 - 50,000 Mono; 2,000 - 10,000 Color
Dynamic Range	51 dB
Readout Noise	17.5 e-

FRAME RATE CHART

Table provides examples of common resolutions and frame rates. The record times shown are for 8GB RAM at the frame rate shown. Duration will be double for 16GB.

Maximum Frame Rate - FPS; (8GB Record time - Sec)	
Resolution (H x V)	Miro C320J / C320
1920 x 1080	1,480 (2.24)
1920 x 800	1,990 (2.25)
1280 x 1024	1,560 (3.36)
1280 x 512	3,090 (3.39)
640 x 480	3,290 (6.8)
640 x 128	11,700 (7.17)
640 x 64	22,000 (7.63)
640 x 8	94,510 (14.2)





CONNECTIVITY & SIGNALS		
	C320J	C320
Ethernet	Gb Ethernet accessed through System Cable	Gb Ethernet accessed through Fischer Connector
Timecode	IRIG In & Out- Unmodulated	IRIG In- Modulated/Unmodulated; IRIG Out - Unmodulated
Port Descriptions	Fischer 27-pin System port, for Trigger, IRIG In/Out, Strobe, Event, Memgate, FSYNC, READY Out, Power from J-Box	Fischer 12-Pin Capture
		Fischer 8-pin Gb Ethernet
		Fischer 6-pin Power
Hardware Trigger	System cable, to Jbox	Capture port, to MiniBoB (included)
Software Trigger	via PCC over Ethernet; via Image Based Auto trigger (IBAT)	
Synchronization	External Sync via FSync or IRIG Timecode	
Recording Features	Burst mode, Continuous recording & AutoSave to internal Flash	
Video Output	HD-SDI, through DIN connector on camera front	



Miro C320/C320J Connectors With the Miro Junction Box 2.0

CONTROL	
Software & OS	Phantom PCC (Windows); SDK also available for C++ and with MatLab and LabView Drivers
Primary File Format	Phantom Cine RAW (.cine)
Alternative File Formats	Easily convert to formats including .mp4, Apple ProRes .mov, .avi, Tiff, JPG, DNG and many more using PCC Cine files are directly compatible with many major video editing and motion analysis programs
Highlighted Software Features	Auto-Save to Flash, Continuous recording, Advanced Image Tools and Processing

MEMORY & STORAGE

RAM Buffer	8GB, 16GB RAM
Multi-Cine	Up-to 63 Partitions
Non-Volatile Media	240GB of internal Flash included

POWER

AC Power	100 - 250 VAC, 40W power supply included with C320 Model
Voltage Range	16-32VDC
Power Consumption	13 W typical, up to 20W when charging battery
Battery Options	Internal battery included for data protection

MECHANICAL

Housing Variants	C320J and C320
Size	C320J: 2.9 x 3.1 x 3.4" (73 x 79.5 x 87.2 mm); C320: 2.9 x 2.9 x 3.4" (73 x 73 x 87.2 mm)
Weight	1.2 lbs (0.54 kg)
Lens Mounts	1" C-Mount
Mounting Points	4 x 1/4-20, 10 x M4
Cooling	Active cooling. Quiet mode disables fans during capture.


ENVIRONMENTAL

Operating Temperature	0 to +50°C
Storage Temperature	-20 to +70°C
Operational Shock	170G IAW MIL-STD-202G Method 213-B; sawtooth wave, 11ms, +/- 10 pulses all axes
Operational Vibration	24 Grms IAW MIL-STD-202G Method 214-A.; Figure 2A-1, Test Condition D, 15 min per axis
Regulatory	Made in the USA CE Emissions – CE Compliant EN 61326-1 CE Immunity – CE Compliant EN 61326-1 FCC – CFR 47, Part 15, Subpart B & ICES-0003, Class A KC Emissions – KC Compliant KC Immunity – KC Compliant Safety - IEC 60950-1

GLOBAL SUPPORT NETWORK

The Phantom Miro C Cameras are supported by Vision Research's Global Service and Support network, offering PhantomCare Performance Services from multiple sites around the globe. Maximize the value of your Phantom camera with a selection of professional services from which to choose.

Learn more about our service offering at www.phantomhighspeed.com/Service-Support

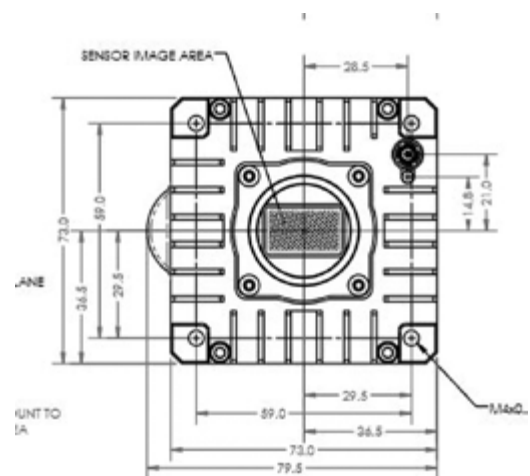

ABOUT VISION RESEARCH

Focused. Since 1950, Vision Research has been designing, and manufacturing high-speed cameras. Our single focus is to invent, build, and support the most advanced cameras possible.

ViSiON
RESEARCH

AMETEK[®]
MATERIALS ANALYSIS DIVISION

100 Dey Road
Wayne, NJ 07470 USA
+1.973.696.4500